








RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

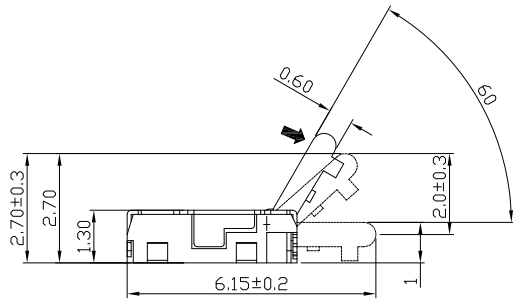


P.C.B MOUNTING PATTERN DIMENSION
The following soldering patterns are recommended for reflow soldering



CIRCUIT DIAGRAM



PRODUCT IMAGE



ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

Rating	DC 5V 1A
Contact Resistance	3Ω Max.
Insulation Resistance	100MΩ Min. (DC100V/1min.)
Dielectric	100VAC/5S
Operating Force	40gf±20gf
Operating Life(cycles)	50,000

.X	±0.2	X.	±2'
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
MAT'L					
SEE NOTE		TITLE:	PART NO.:		
		DETECTOR SWITCH	AD-1107 SERIES		
FINISH		DR: Ricky 2026/09/11	DWG NO.:		
SEE NOTE		CHKD: Ricky 2026/09/11	ASI-1107		
Q'TY		APPD:	SCALE	SHEET	REV.
			1:1	1/1	A
					CUSTOMER DRAWING