







REV.	ECN.	NO.	APPD.



CIRCUIT DIAGRAM

PRODUCT IMAGE

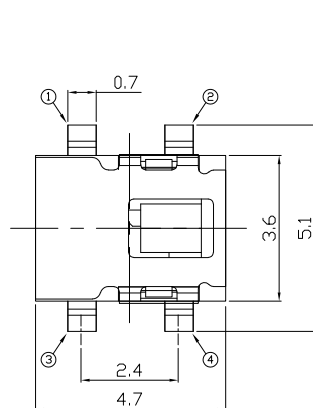

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

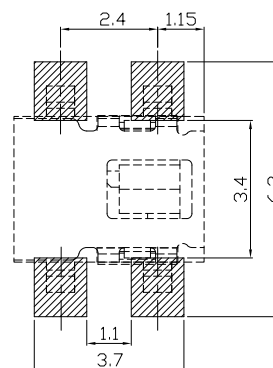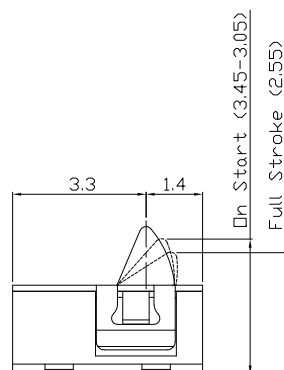

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 16V 1A
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min. (DC500V/1min.)
Dielectric	500VAC/5S
Operating Force	50gf±20gf
Operating Life(cycles)	20,000

					.X ±0.2	X. ±2*	UNITS mm	雅 安 科 技 有 限 公 司 ACCURATE INNOTECH INC.					
							MAT'L	TITLE:		PART NO.:			
							SEE NOTE	DETECTOR SWITCH		AD-1110 SERIES			
							FINISH	DR:	<i>Ricky</i> 2026/09/11	DWG NO.:			
							SEE NOTE	CHKD:	<i>Ricky</i> 2026/09/11	ASI-1110			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER
									1:1	1/1	A	DRAWING	
1	2	3	4	5	6	7							