






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

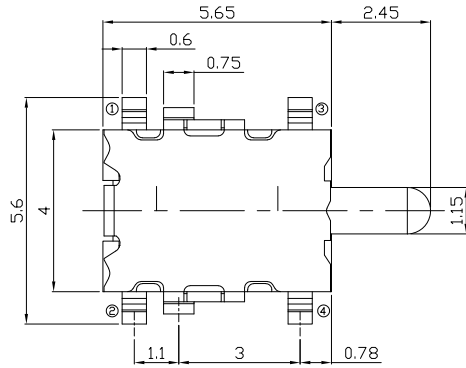

CIRCUIT DIAGRAM





PRODUCT IMAGE



P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

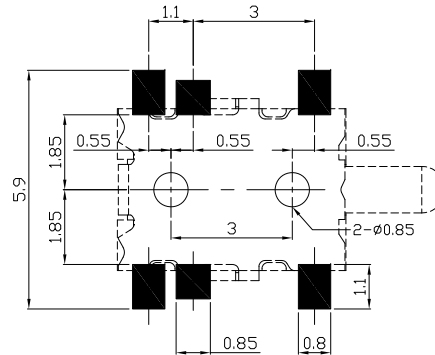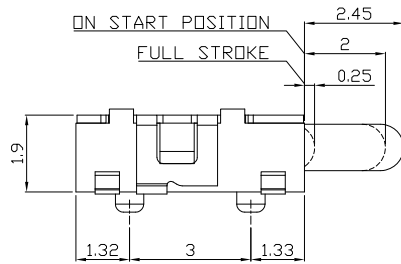

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 0.1A
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min. 100V
Operating Force	100±50gf
Operating Life(cycles)	50,000

.X	±0.3	X.	±2'
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
MAT'L					
SEE NOTE		TITLE:	PART NO.:		
		DETECTOR SWITCH	AD-1118SERIES		
FINISH		DR:	DWG NO.:		
SEE NOTE		Ricky 2026/09/11	ASI-1118		
Q'TY		CHKD:			
		Ricky 2026/09/11			
		APPD:	SCALE	SHEET	REV.
			1:1	1/1	A
			CUSTOMER DRAWING		