



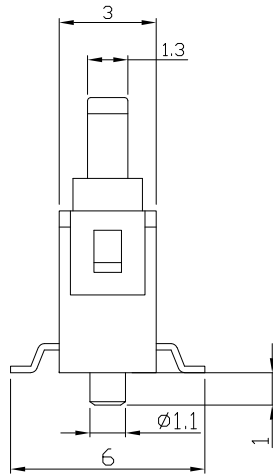


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

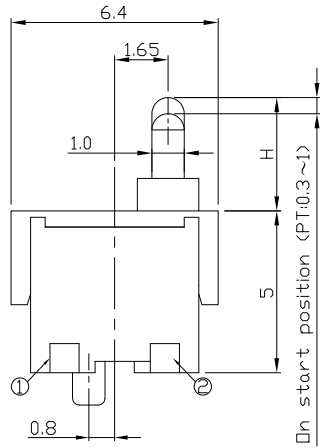

CIRCUIT DIAGRAM



PRODUCT IMAGE





MODEL CODE

AD-1120S-	H	
	—	3.5
	C	6.0

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

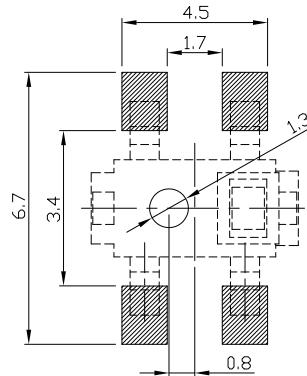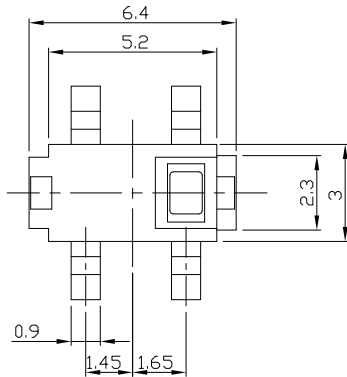

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 30V 10mA
Contact Resistance	1Ω Max.
Operating Force	40gf Max.
Operating Life(cycles)	50,000

.X	±0.2	X.	±2'
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

UNITS	mm
MAT'L	
SEE NOTE	
FINISH	
SEE NOTE	
Q'TY	

雅安科技有限公司 ACCURATE INNOTECH INC.			
TITLE:	DETECTOR SWITCH	PART NO.:	AD-1120S SERIES
DR:	Ricky 2026/09/11	DWG NO.:	ASI-1120S
CHKD:	Ricky 2026/09/11	SCALE	1:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER	DRAWING