

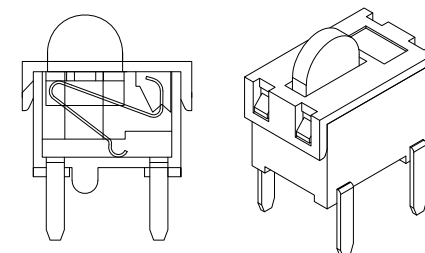



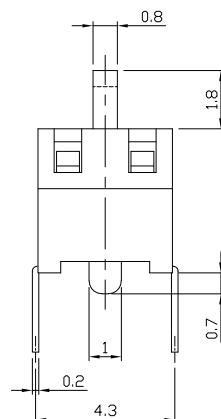

REV.	ECN.	NO.	APPD.

CIRCUIT DIAGRAM



PRODUCT IMAGE

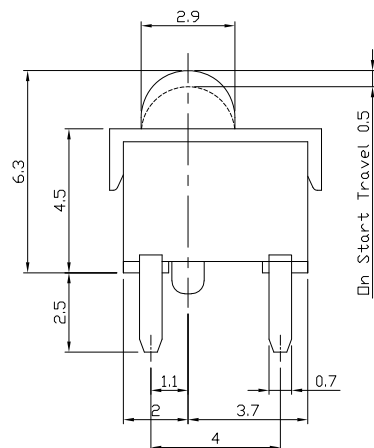

ELECTRO-MECHANICAL CHARACTERISTICS

The following soldering patterns are recommended for reflow soldering

Refer to additional specifications

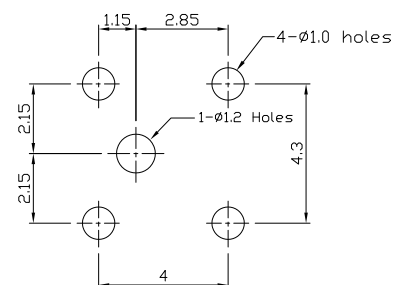

Rating	DC 12V 0.1A
Contact Resistance	200mΩ Max.
On Start Travel	0.5±0.2mm
Full Stroke	1.8±0.2mm
Operating Force	100±50gf
Operating Life(cycles)	50,000

.X	±0.2	X.	±2'	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
				MAT'L		TITLE:		PART NO.:		
				SEE NOTE		DETECTOR SWITCH		AD-1126 SERIES		
				FINISH		DR:		DWG NO.:		
				SEE NOTE		Ricky 2026/09/11		ASI-1126		
				Q'TY		CHKD:		SCALE		
						Ricky 2026/09/11		SHEET		REV.
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.						APPD:		CUSTOMER DRAWING		
								1:1 1/1 A		