






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

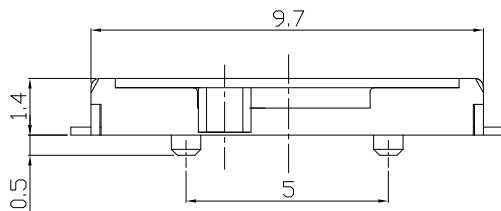

CIRCUIT DIAGRAM




PRODUCT IMAGE

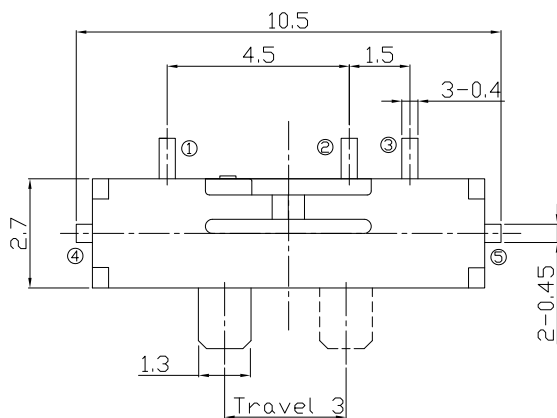

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

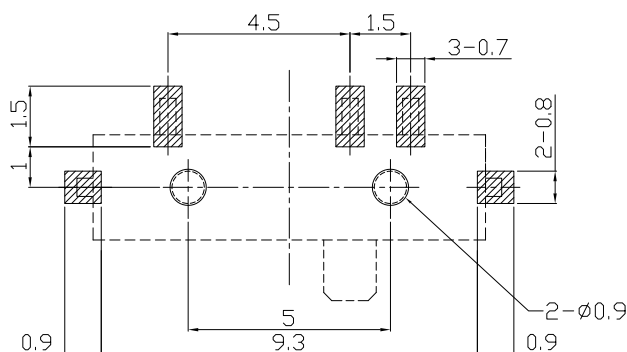

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 4V 30mA
Circuit	1C-2P
Contact Resistance	70mΩ Max.
Travel	3.0 ± 0.2mm
Operating Force	150±100gf
Operating Life(cycles)	10,000

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
MAT'L	SEE NOTE	TITLE:	PART NO.:		
FINISH	SEE NOTE	MINI SLIDE SWITCH	AS-1201 SERIES		
Q'TY	SEE NOTE	DR: Ricky 2026/09/11	DWG NO.: ASI-1201		
		CHKD: Ricky 2026/09/11	SCALE	SHEET	REV.
		APPD:	1:1	1/1	A
					CUSTOMER DRAWING