



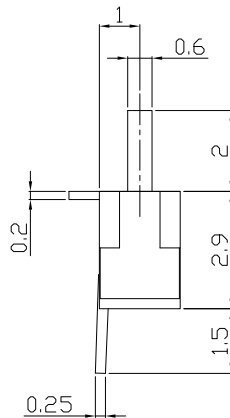


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

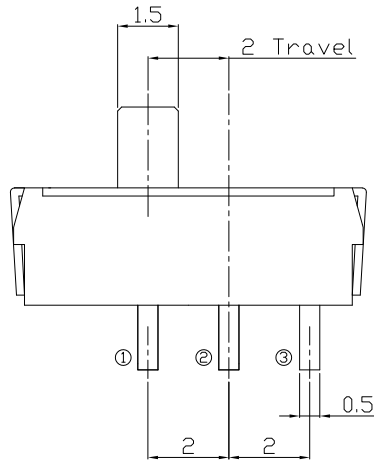

CIRCUIT DIAGRAM



PRODUCT IMAGE



MODEL CODE

AS-1270L - B

Knob Color	
B	Black
W	White



P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 4V 0.3A
Circuit	1C-2P
Contact Resistance	70mΩ Max.
Travel	2.0 ± 0.2mm
Operating Force	150±100gf
Operating Life(cycles)	10,000

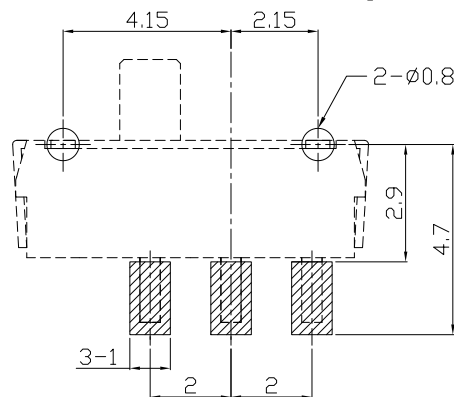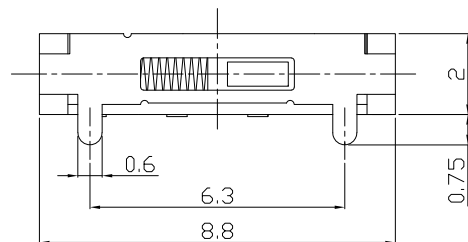

.X	±0.2	X.	±2'
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

UNITS				mm			
MAT'L				SEE NOTE			
FINISH				SEE NOTE			
Q'TY							

雅安科技有限公司
ACCURATE INNOTECH INC.

TITLE:		PART NO.:	
MINI SLIDE SWITCH		AS-1270L SERIES	
DR: Ricky 2026/09/11		DWG NO.: ASI-1270L	
CHKD: Ricky 2026/09/11		SCALE	
APPD:		1:1	1/1
		REV. A	CUSTOMER DRAWING