




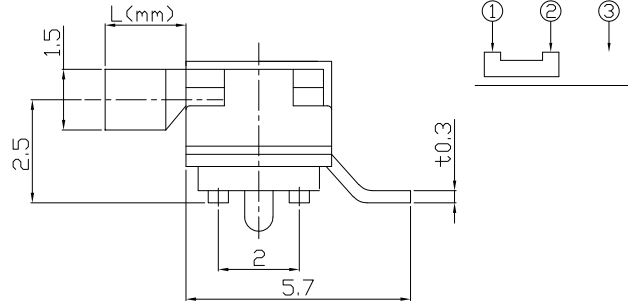

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

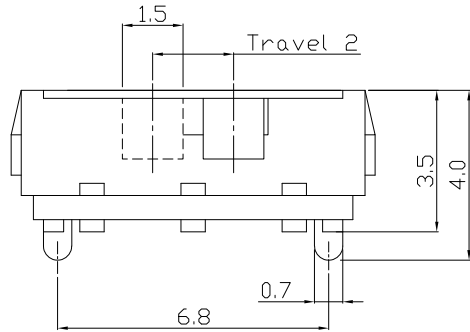

AS-1280		-B	
L (mm)	Knob Color		
- 2.0	B Black		
A 4.0	W White		
B 3.0			



CIRCUIT DIAGRAM

PRODUCT IMAGE

MODEL CODE

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

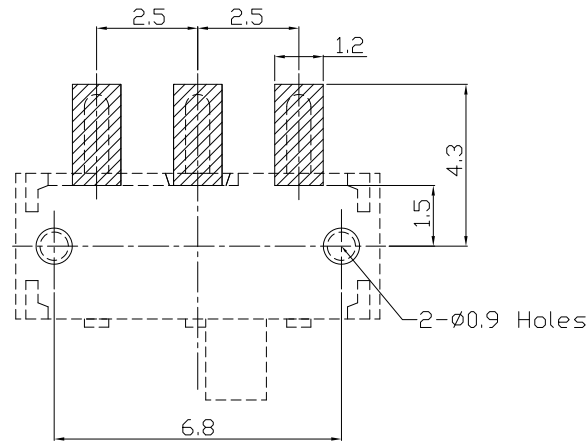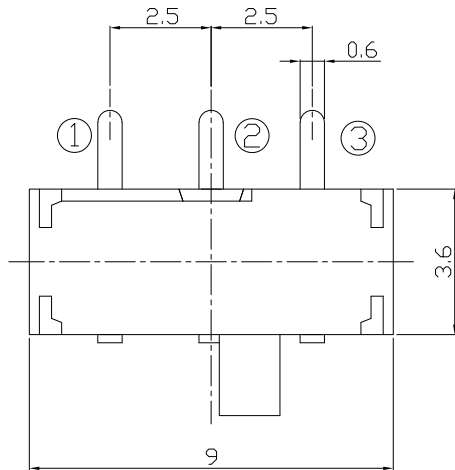

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 6V 0.3A
Circuit	1C-2P
Contact Resistance	70mΩ Max.
Travel	2.0 ± 0.3mm
Operating Force	200±100gf
Operating Life(cycles)	10,000

.X	±0.2	X.	±2'
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
MAT'L		TITLE:	PART NO.:		
SEE NOTE		MINI SLIDE SWITCH	AS-1280 SERIES		
FINISH		DR: Ricky 2026/09/11	DWG NO.:		
SEE NOTE		CHKD: Ricky 2026/09/11	ASI-1280		
Q'TY		APPD:	SCALE	SHEET	REV.
			1:1	1/1	A
			CUSTOMER DRAWING		