

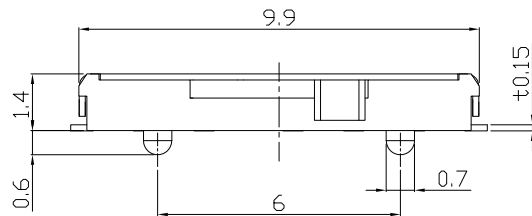




RoHS
Compliant
2002/95/EC


REV.	ECN.	NO.	APPD.

DIMENSIONS

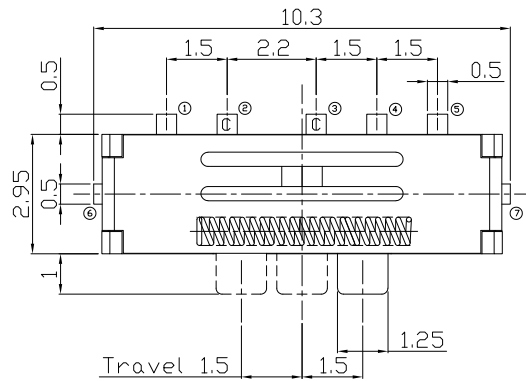


P.C.B MOUNTING PATTERN DIMENSION


The following soldering patterns are recommended for reflow soldering

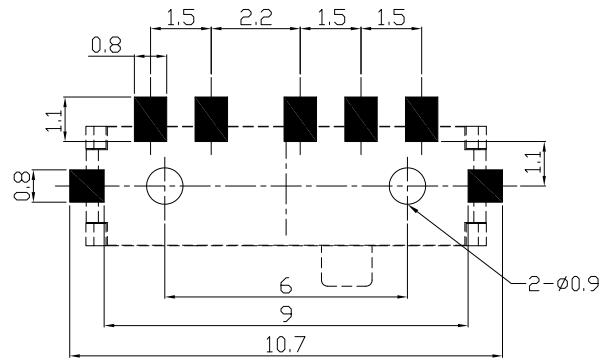

CIRCUIT DIAGRAM



PRODUCT IMAGE



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 4V 30mA
Circuit	1C-3P
Contact Resistance	70mΩ Max.
Travel	1.5 ± 0.2mm
Operating Force	160±70gf
Operating Life(cycles)	10,000

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE: MINI SLIDE SWITCH		PART NO.: AS-1303L SERIES	
Q'TY		DR: Ricky 2026/09/11		DWG NO.: ASI-1303L	
		CHKD: Ricky 2026/09/11		SCALE: 1:1	
		APPD:		SHEET: 1/1	
				REV: A	
				CUSTOMER DRAWING	