






REV.	ECN.	NO.	APPD.


CIRCUIT DIAGRAM

PRODUCT IMAGE



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

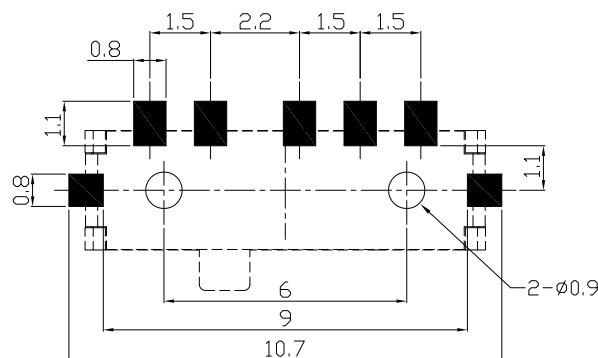

Rating	DC 4V 30mA
Circuit	1C-3P
Contact Resistance	70mΩ Max.
Travel	1.5 ± 0.2mm
Operating Force	160±70gf
Operating Life(cycles)	10,000

					.X ±0.2	X. ±2*	mm	雅 安 科 技 有 限 公 司 ACCURATE INNOTECH INC.						
							MAT'L	TITLE:		PART NO.:				
							SEE NOTE	MINI SLIDE SWITCH		AS-1303R SERIES				
							FINISH	DR: <i>Ricky</i> 2026/09/11		DWG NO.:				
							SEE NOTE	CHKD: <i>Ricky</i> 2026/09/11		ASI-1303R				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD:		SCALE		SHEET	REV.	CUSTOMER DRAWING
								APPD:		1:1		1/1	A	
1	2	3	4	5	6	7								