



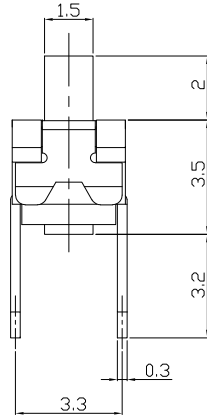


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

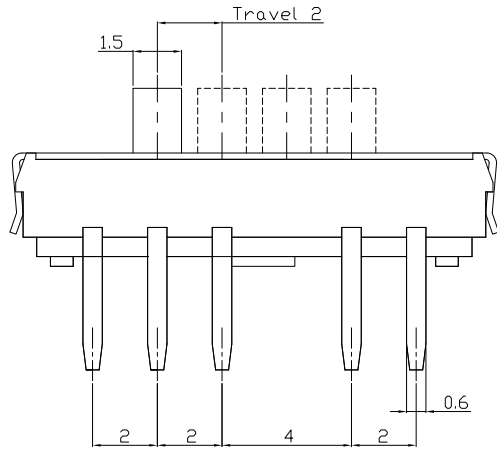

CIRCUIT DIAGRAM





PRODUCT IMAGE



P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

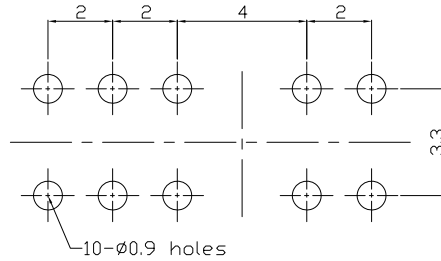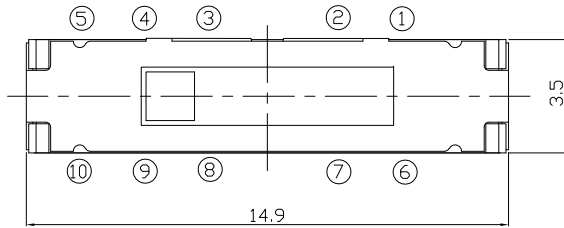

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Circuit	2C-4P
Contact Resistance	100mΩ Max.
Travel	2.0 ± 0.1mm
Operating Force	250±100gf
Operating Life(cycles)	10,000

					.X ±0.2	X. ±2'	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
							MAT'L	TITLE: MINI SLIDE SWITCH		PART NO.: AS-2437 SERIES			
							SEE NOTE						
							FINISH	DR: Ricky 2026/09/11	DWG NO.: ASI-2437				
							SEE NOTE						
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD: Ricky 2026/09/11	SCALE		SHEET	REV.	CUSTOMER DRAWING
								APPD:	1:1	1/1	A		
1	2	3	4	5	6	7							