






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

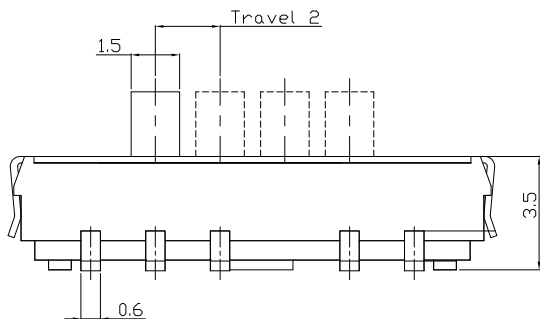

CIRCUIT DIAGRAM




PRODUCT IMAGE

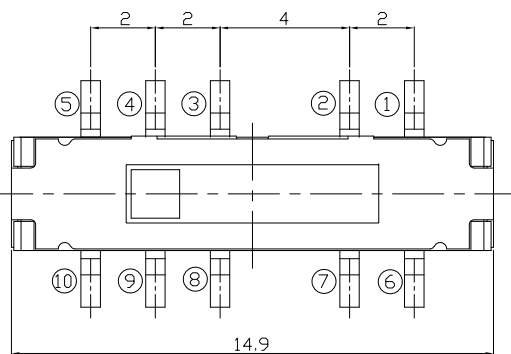

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

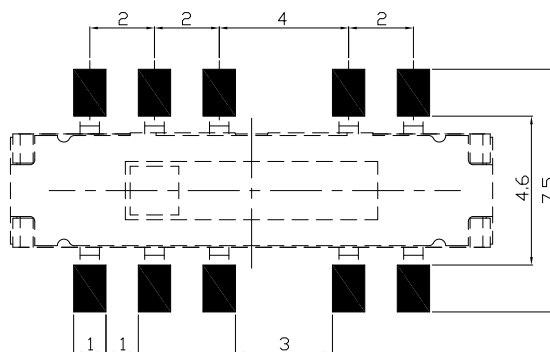

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Circuit	2C-4P
Contact Resistance	100mΩ Max.
Travel	2.0 ± 0.1mm
Operating Force	250±100gf
Operating Life(cycles)	10,000

.X	±0.2	X.	±2'
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	MINI SLIDE SWITCH	PART NO.:	AS-2437S SERIES
Q'TY		DR:	Ricky 2026/09/11	DWG NO.:	ASI-2437S
		CHKD:	Ricky 2026/09/11	SCALE	1:1
		APPD:		SHEET	1/1
				REV.	A
				CUSTOMER	DRAWING