






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

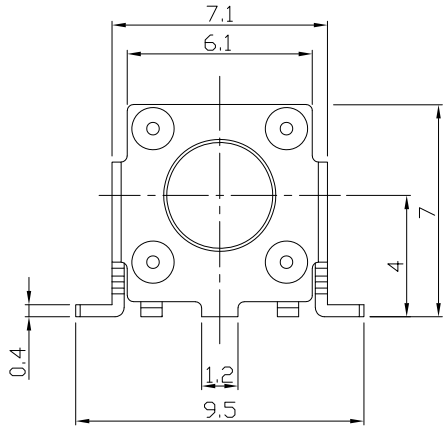

CIRCUIT DIAGRAM

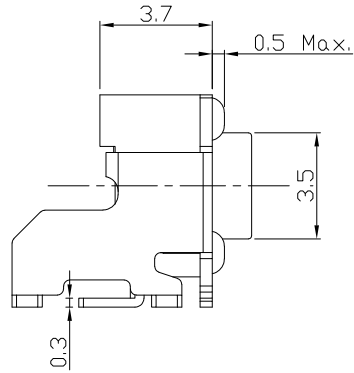

PRODUCT IMAGE





MODEL CODE

AT-1102HS-		H
-	4.3	
A	5.0	
AL	5.5	
Q	6.0	
B	7.0	
C	8.0	
D	9.5	

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

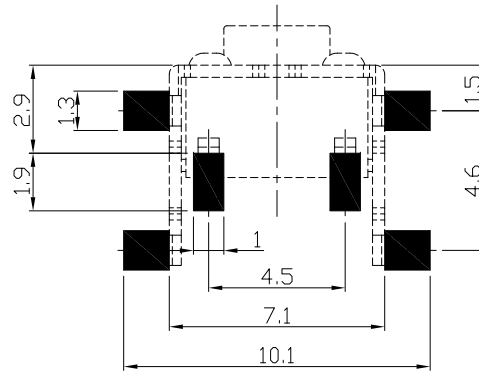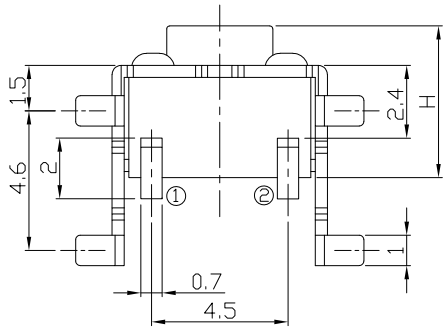

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	160±30gf	250±50gf
Operating Life(cycles)	100,000	

.X	±0.3	X.	±2°
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
MAT'L					
SEE NOTE		TITLE:	PART NO.:		
FINISH		TACT SWITCH		AT-1102HS SERIES	
SEE NOTE		DR:	Ricky 2026/08/17	DWG NO.:	
Q'TY		CHKD:	Ricky 2026/08/17	ASI-1102HS	
		APPD:		SCALE	SHEET
				1:1	1/1
				REV.	CUSTOMER
				A	DRAWING