





RoHS
Compliant
2002/95/EC




REV.	ECN.	NO.	APPD.

DIMENSIONS

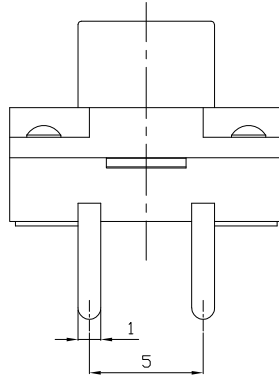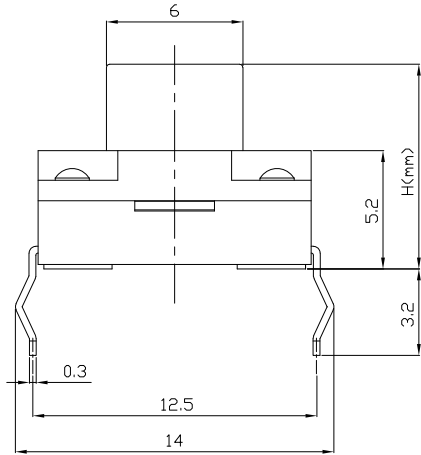

CIRCUIT DIAGRAM





MODEL CODE

AT-1144-	H
6.0	
6.5	
7.0	
7.5	
8.0	
8.5	
9.0	
10.0	

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

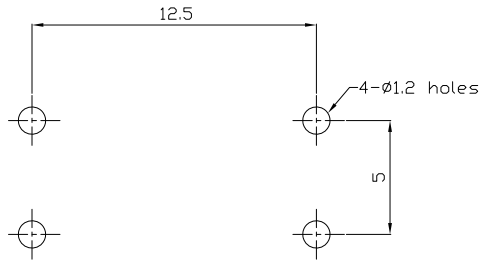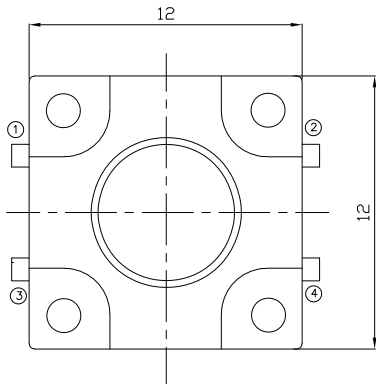

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Insulation Resistance	100MΩ (DC 500V / 1 min) Min.
Withstanding Voltage	250 VAC / min.
Travel	0.3 ± 0.2mm
Operating Force	250±70gf
Operating Life(cycles)	100,000

.X	±0.3	X.	±2'
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
MAT'L	SEE NOTE	TITLE:	PART NO.:		
FINISH	SEE NOTE	DR:	AT-1144 SERIES		
Q'TY		CHKD:	DWG NO.:		
		APPD:	SCALE	SHEET	REV.
			1:1	1/1	A
			CUSTOMER DRAWING		