

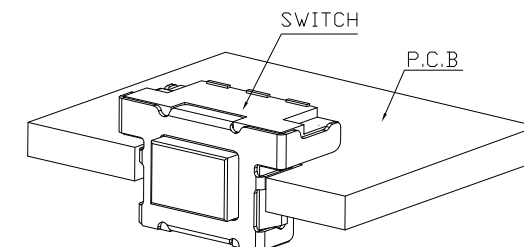




REV.	ECN.	NO.	APPD.


PRODUCT IMAGE



3D PHOTO

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

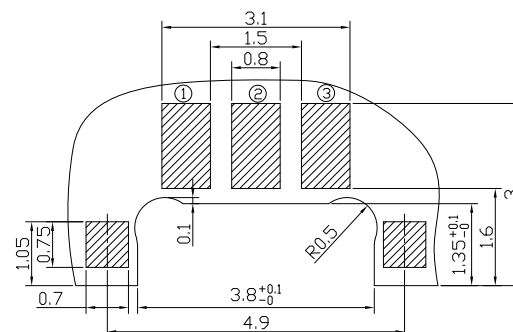

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.15±0.1mm	
Operating Force	160±50gf	250±50gf
Operating Life(cycles)	100,000	

.X ±0.2		X. ±2'		UNITS mm		雅安科技有限公司 ACCURATE INNOTECH INC.								
				MAT'L		TITLE:			PART NO.:					
				SEE NOTE		TACT SWITCH			AT-1182C SERIES					
				FINISH		DR:			DWG NO.:					
				SEE NOTE		Ricky 2026/08/17			ASI-1182C					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				Q'TY		CHKD:			SCALE			SHEET	REV.	CUSTOMER DRAWING
						Ricky 2026/08/17			1:1			1/1	A	
						APPD:								