

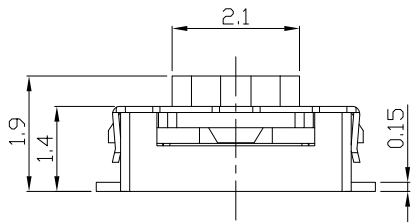





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

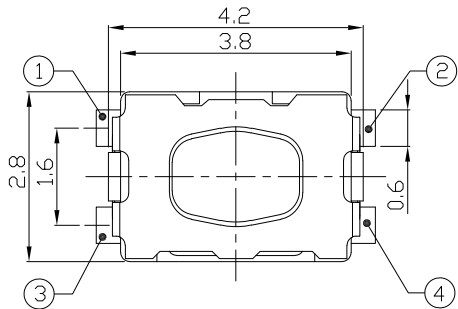


P.C.B MOUNTING PATTERN DIMENSION
The following soldering patterns are recommended for reflow soldering

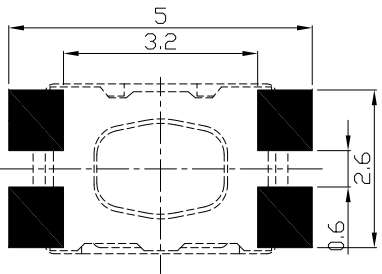

CIRCUIT DIAGRAM



PRODUCT IMAGE



ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.2 ± 0.1mm	
Operating Force	160±30gf	250±50gf
Operating Life(cycles)	100,000	

				.X ±0.3	X. ±2'	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
						MAT'L				
						SEE NOTE	TITLE: TACT SWITCH		PART NO.: AT-1185MBP1 SERIES	
						FINISH	DR: Ricky 2026/08/15		DWG NO.: ASI-1185MBP1	
						SEE NOTE	CHKD: Ricky 2026/08/15		SCALE 1:1	
						Q'TY	APPD:		SHEET 1/1	
									REV. A	
									CUSTOMER DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.