







REV.	ECN.	NO.	APPD.

CIRCUIT DIAGRAM



PRODUCT IMAGE



ELECTRO-MECHANICAL CHARACTERISTICS

The following soldering patterns are recommended for reflow soldering

Refer to additional specifications

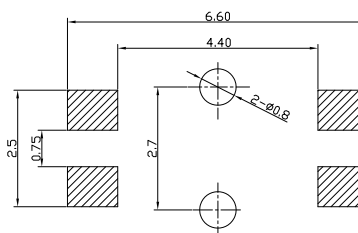

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.2 ± 0.1mm	
Operating Force	160±50gf	250±50gf
Operating Life(cycles)	100,000	

					.X ±0.3	X. ±2*	UNITS mm	雅 安 科 技 有 限 公 司 ACCURATE INNOTECH INC.					
							MAT'L	TITLE:		PART NO.:			
							SEE NOTE	TACT SWITCH		AT-1189KBP2 SERIES			
							FINISH	DR: <i>Ricky</i> 2026/08/15		DWG NO.:			
							SEE NOTE	CHKD: <i>Ricky</i> 2026/08/15		ASI-1189KBP2			
						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	A	
1	2	3	4	5	6	7							