Pb Process Capable

RoHS Compliant 2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

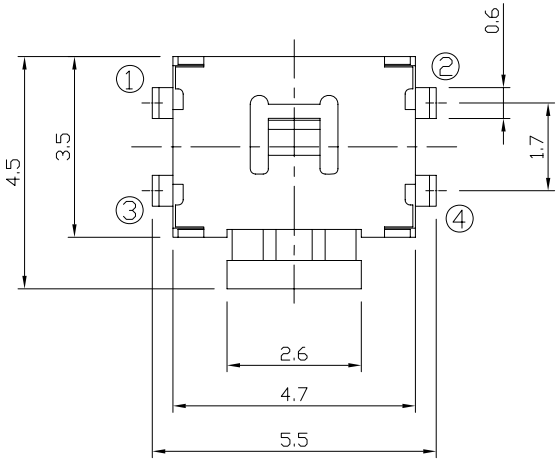





CIRCUIT DIAGRAM

P.C.B MOUNTING PATTERN DIMENSION

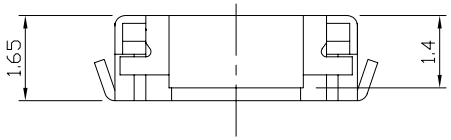

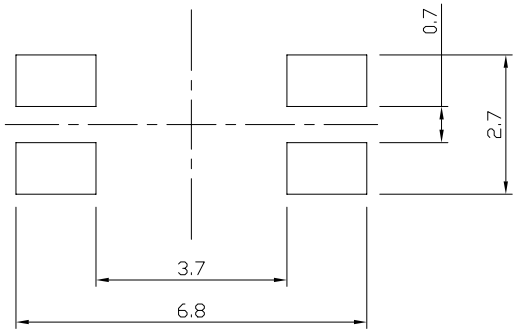

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 50mA
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	0.3±0.1mm
OPERATING FORCE	220±50gf
OPERATING LIFE(cycles)	100,000

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				
6				
5				
4				
3				
2				
1				

.X ±0.3	X. ±3°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

雅安科技有限公司
ACCURATE INNOTECH INC.

TITLE: TACT SWITCH	PART NO.: AT-1189U SERIES
DR: Ricky 2015/05/06	DWG NO.: AKS-1189U
CHKD: Ricky 2015/05/06	SCALE 1:1 / SHEET 1/1 / REV. A / CUSTOMER DRAWING
APPD:	