



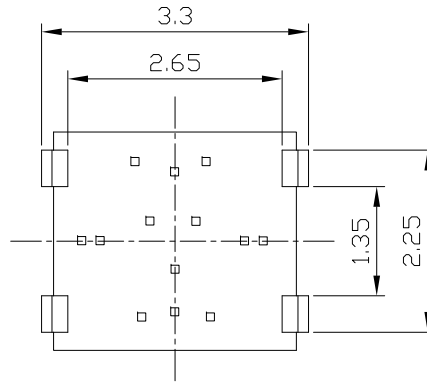


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

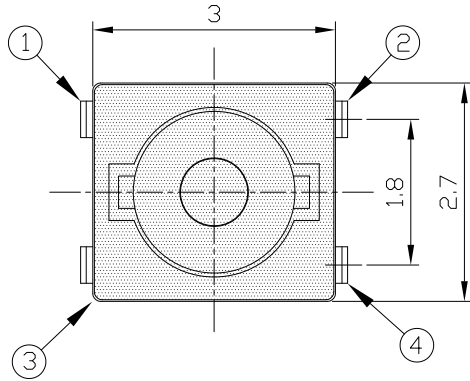

CIRCUIT DIAGRAM



PRODUCT IMAGE





P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

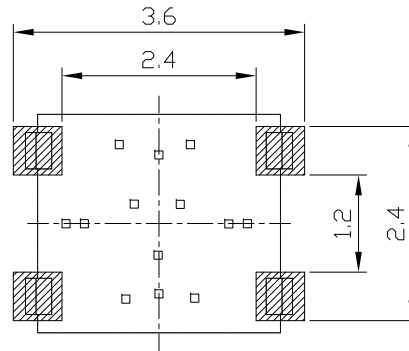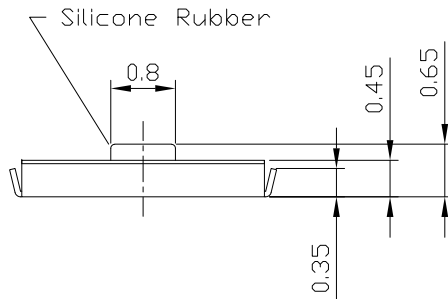

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.15 ± 0.1mm
Operating Force	200±50gf
Operating Life(cycles)	50,000

					.X	±0.2	X.	±2'	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
									MAT'L		TITLE: TACT SWITCH		PART NO.: AT-1196A SERIES		
									SEE NOTE						
									FINISH		DR: <i>Ricky</i> 2026/08/15	DWG NO.: ASI-1196A			
									SEE NOTE						
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				Q'TY		CHKD: <i>Ricky</i> 2026/08/15	SCALE	SHEET	REV.	CUSTOMER DRAWING
														APPD:	
1	2	3	4	5						6	7				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

