

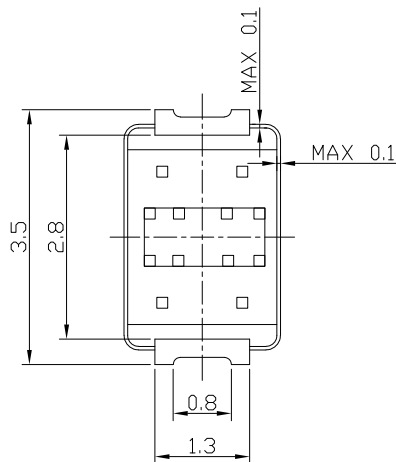


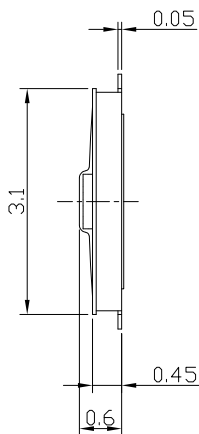


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

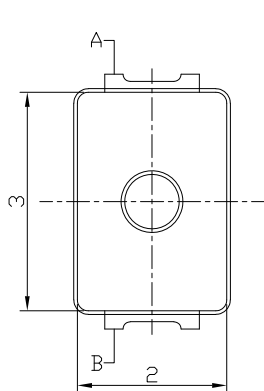

CIRCUIT DIAGRAM





PRODUCT IMAGE



P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

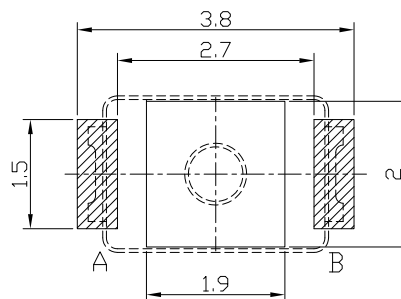

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.15 ± 0.10mm
Operating Force	200±50gf
Operating Life(cycles)	100,000

					.X ±0.2	X. ±2'	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
							MAT'L	TITLE: TACT SWITCH			
							SEE NOTE	PART NO.: AT-1203 SERIES			
							FINISH	DR: Ricky 2026/08/15			
							SEE NOTE	DWG NO.: ASI-1203			
							Q'TY	CHKD: Ricky 2026/08/15			
								APPD:			
								SCALE	SHEET	REV.	CUSTOMER
								1:1	1/1	A	DRAWING