




REV	LTR	DESCRIPTION	DATE	REVISER	APPD

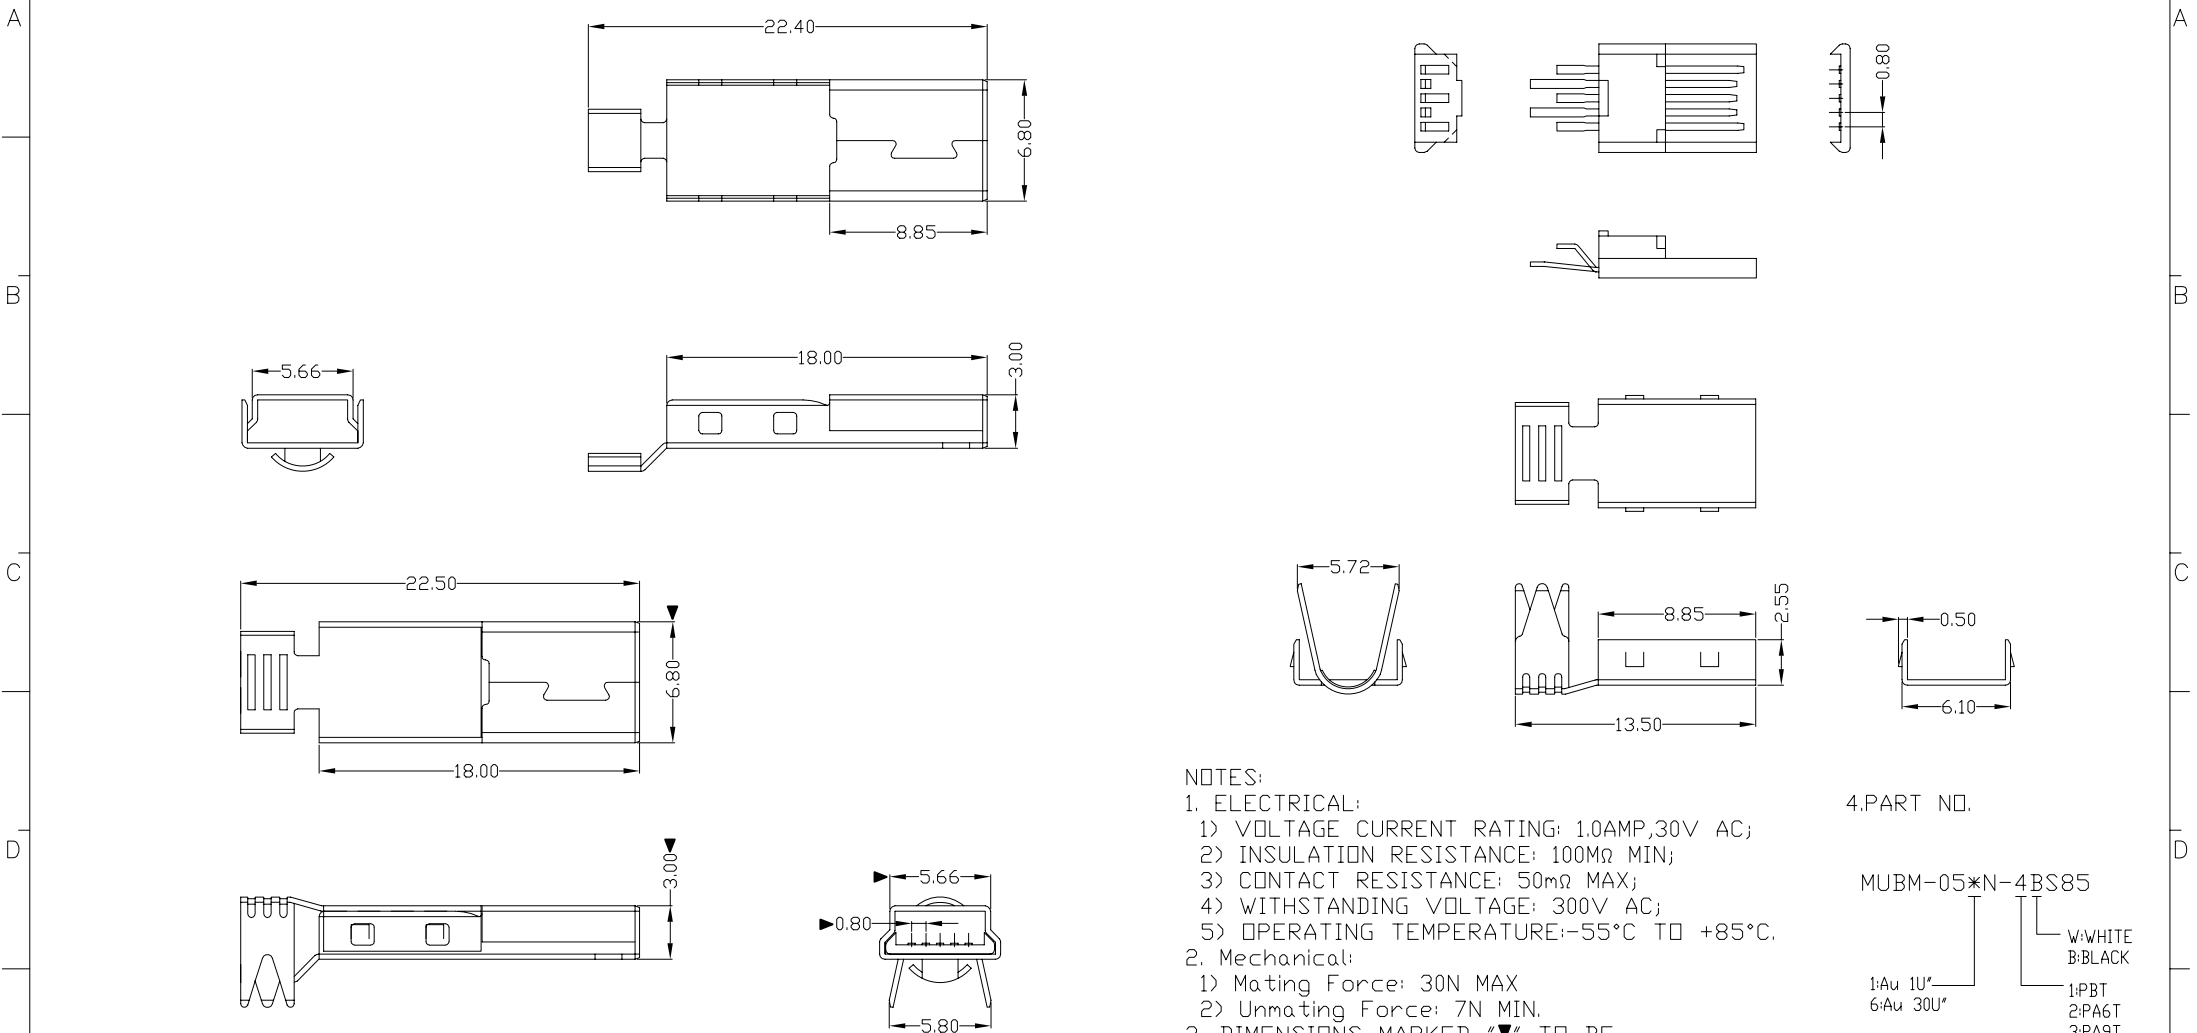

NOTES:
1. ELECTRICAL:
1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
2) INSULATION RESISTANCE: 100MΩ MIN;
3) CONTACT RESISTANCE: 50mΩ MAX;
4) WITHSTANDING VOLTAGE: 300V AC;
5) OPERATING TEMPERATURE:-55℃ TO +85℃.
2. Mechanical:
1) Mating Force: 30N MAX
2) Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE
CHECKED BY Q.C & IPQC.

4.PART NO.
MUBM-05*N-4BS85
W:WHITE
B:BLACK
1:1U*
2:PA6T
3:PA9T
4:LCP
1:Au 1U*
6:Au 30U*

Bill of materials:

4	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
3	UP SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L						
					.XX ±0.25	.XX*	SEE NOTE	TITLE: MINI USB 5P/M超薄B型前五后五 (焊线式 三件套)		PART NO.: MUBM-05*N-4BS85			
2	DOWN SHELL	SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX*	FINISH						
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	DR: gan 2012/07/03		DWG NO.: AII-S85			
							Q'TY						
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	B	