

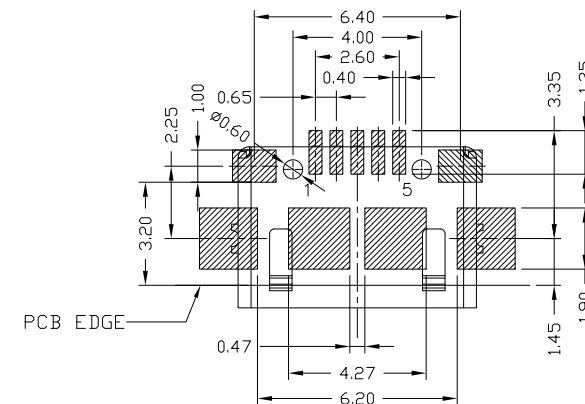







RoHS  
Compliant  
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.

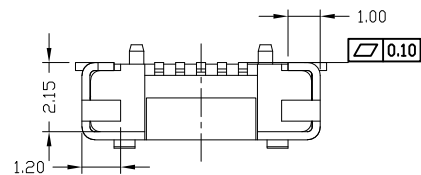

RECOMMENDED PCB LAYOUT

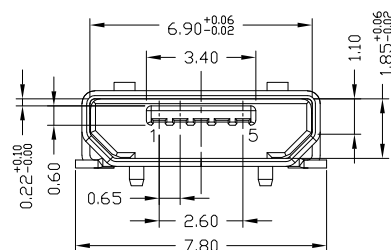

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
  - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05\*T-4BHUA470  
 1:1Au 1U"  
 6:1Au 30U"  
 T:TIN  
 N:NICKEL  
 W:WHITE  
 B:BLACK  
 1:PBT  
 2:PA6T  
 3:PA9T  
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	TOLERANCES	ANGLES	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.							
3	SHELL	STAINLESS STEEL	1	PLATED TIN	.X ±0.15	X.' ±1°	MAT'L	SEE NOTE	TITLE:	MICRO USB B TYPE F 5P SMT 有焊脚有柱无导线			PART NO.:	MUYF-05XT-4BHUA470		
2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.10		FINISH	SEE NOTE	DR:	Ricky 2020/03/17			DWG NO.:	AII-HUA470		
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XXX ±0.05		Q'TY	SEE NOTE	CHKD:	Ricky 2020/03/17			SCALE	SHEET	REV.	CUSTOMER
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.									APPD:		Ricky 2020/03/17		5:1	1/1	A	DRAWING