


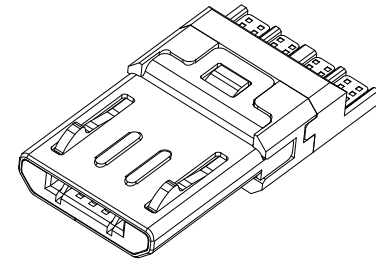
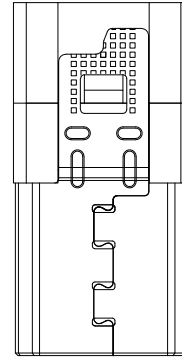


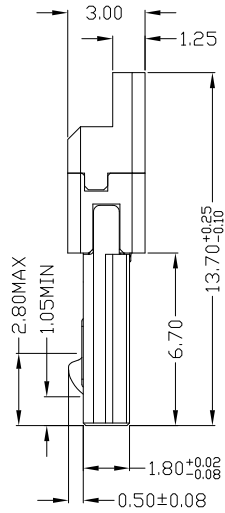

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

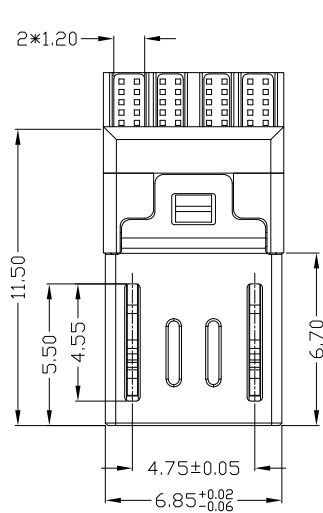

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING: 1AMP,30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 250V AC;
- 5)OPERATING TEMPERATURE:-30°C TO +85°C.

2.MECHANICAL:

- 1)MATING FORCE: 35N MAX.
- 2)UNMATING FORCE: 8N MIN.

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYM-051N-4BSU53

1:Au 1U"
6:Au 30U"

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

5	LATCH	STAINLESS STEEL	2		.X	±0.30	.X'	±5'	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
4	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX	±0.20	.XX'	±2'	MAT'L					
3	CONTACT	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX	±0.10			SEE NOTE		TITLE: MICRO USB BM 5P T=3.0 L=13.7 外露6.7 单排 前五后四 插针式			
2	BACK PLUG	LCP+30%GF	1	UL94V-0					FINISH		PART NO.: MUYM-05XN-4BSU53			
1	HOUSING	LCP+30%GF	1	UL94V-0					SEE NOTE		DR: Ricky 2025/05/08			
NO	PARTS	MATERIAL	QTY	FINISHING					Q'TY		CHKD: Ricky 2025/05/08			
											APPD:			
											SCALE	SHEET	REV.	CUSTOMER DRAWING
											1:1	1/1	A	