


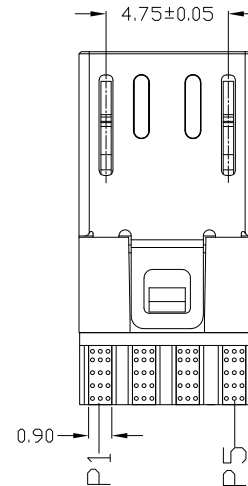
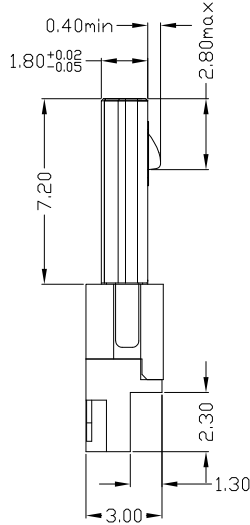


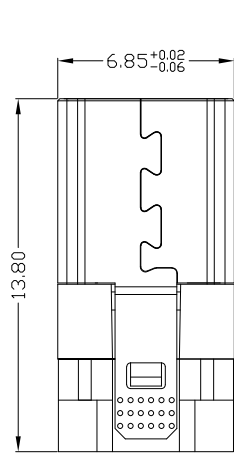

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING: 1AMP,30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 250V AC;
- 5)OPERATING TEMPERATURE:-30°C TO +85°C.

2.MECHANICAL:

- 1)MATING FORCE: 35N MAX.
- 2)UNMATING FORCE: 8N MIN.

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYM-051N-4BSU54

1:Au 1U"
6:Au 30U"

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

5					.X	±0.30	.X'	±5'	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.							
4	LATCH	STAINLESS STEEL	2		.XX	±0.20	.XX'	±2'	MAT'L									
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX	±0.10			SEE NOTE		TITLE:	PART NO.: MUYM-05XN-4BSU54						
2	CONTACT	COPPER ALLOY	5	PLATED GOLD/TIN					FINISH		MICRO USB BM 5P T=3.0 L=13.8 外露 7.2 单排 前五后四 不短路不通槽							
1	HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					SEE NOTE	DR:	Ricky	2025/05/09	DWG NO.: AII-SU54				
NO	PARTS	MATERIAL	QTY	FINISHING						Q'TY	CHKD:	Ricky	2025/05/09					
											APPD:	SCALE 1:1				SHEET 1/1	REV. A	CUSTOMER DRAWING