

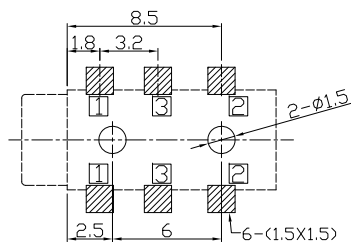


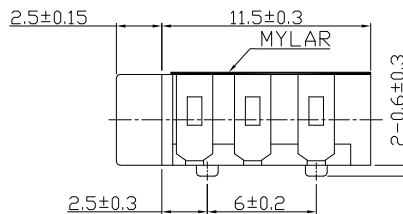


RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS



RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(TOP VIEW)

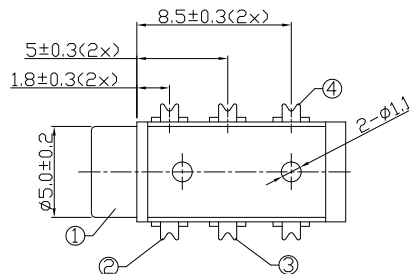

MODEL CODE:


PJB0-3013D-D 10 BK S M0 1
(1) (2)(3) (4) (5)(6)(7)

- (1):Series No.
(2):Schematic option: D
(3):Material of housing:
9T=PA9T
10=PA10T
(4):Housing color:
BK=Black
(5):Terminal plating:
S=Silver(Ag)
(6):Special option:
00=No special option
M0=With Mylar
(7):Packing mode:
1=Reel packing

SPECIFICATION:

- 1.Rating: DC 30V 0.5A;
2.Contact resistance: ≤50mΩ;
After test: ≤100mΩ
3.Insulation resistance: ≥100MΩ (250VDC);
After test: ≥50MΩ
4.Withstand voltage: 500VAC;
5.Insertion and extraction force: 3N~30N;
6.life test: 5000cycles min;
7.Operaton temperature range:-20℃~70℃
8.Preservative temperature range:-40℃~85℃

Model No.	PJB0-3013D-D
Schematic	

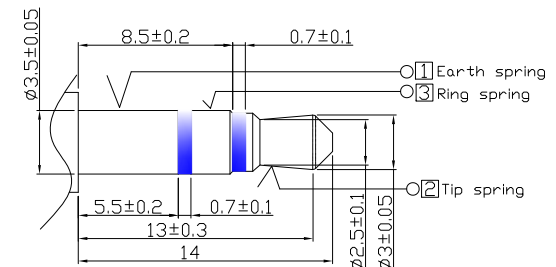

MATCHING PLUG

○: ITEM NO. □: TERMINAL NO.

					TOLERANCE	ANGLES	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
					±0.3	±2°	MAT'L	TITLE: SMD 3.5MM PHONE JACK		PART NO.: PJB0-3013D			
							SEE NOTE	DR: <i>Ricky</i> 2025/06/07		DWG NO.: AB0-3013D			
							FINISH	CHKD: <i>Ricky</i> 2025/06/07		SCALE SHEET REV. CUSTOMER			
④	Tip spring	Stainless steel T=0.25	1	Silver plating	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	APPD:		1:1	1/1	A	DRAWING
③	Ring spring	Stainless steel T=0.2	1	Silver plating									
②	Earth spring	Stainless steel T=0.2	1	Silver plating									
①	Housing	PA9T/PA10T	1	Black									
NO.	PARTS	MATERIAL	Q'TY	FINISHING									