

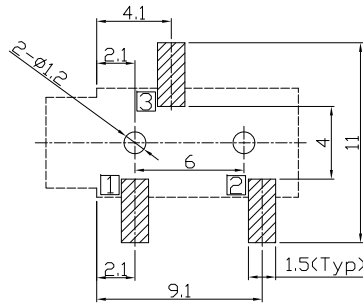


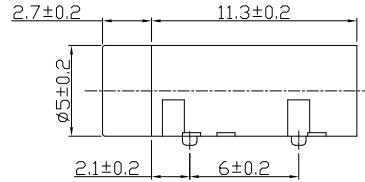


RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS



RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(COPPER-SIDED VIEW)

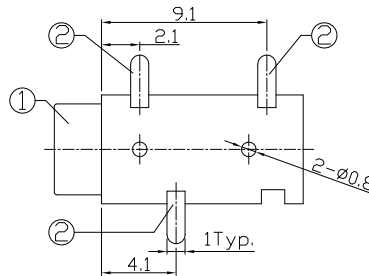

MODEL CODE:


PJB0-3020B-D 10 BK S 00 1
(1) (2)<(3) (4) (5)<(6) (7)

- (1):Series No.
(2):Schematic option: D
(3):Material of housing:
10=PA10T
(4):Housing color:
BK=Black
2L=Red(701C/0445)
5G=Green(577C/0446)
6A=Blue(284C/0443)
(5):Terminal plating:S=Silver(Ag)
(6):Special option:
00=No special option
(7):Packing mode:
1=Reel packing

SPECIFICATION:

- 1.Rating: DC 30V 0.5A;
2.Contact resistance: ≤30mΩ;
After test: ≤50mΩ
3.Insulation resistance: ≥100MΩ (500VDC);
After test: ≥50MΩ
4.Withstand voltage: 500VAC;
5.Insertion and extraction force: 3N~30N;
6.life test: 5000cycles min;
7.Operation temperature range:-20℃~70℃
8.Preservative temperature range:-40℃~85℃

Model No.	PJB0-3020B-D
Schematic	

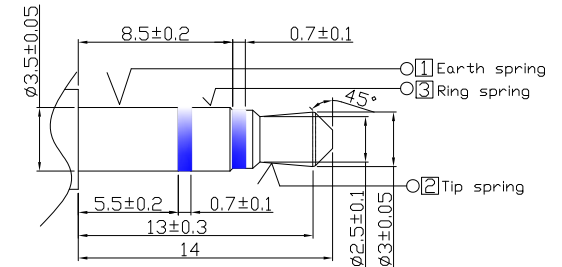

MATCHING PLUG

○: ITEM NO. □: TERMINAL NO.

					TOLERANCE	ANGLES	UNITS	雅安科技有限公司 ACCURATE INNOTECH INC.			
					±0.3	±2°	mm				
							MAT'L	TITLE:		PART NO.:	
							SEE NOTE	SMD 3.5MM PHONE JACK		PJB0-3020B	
							FINISH	DR: Ricky 2025/06/13		DWG NO.:	
							SEE NOTE	CHKD: Ricky 2025/06/13		AB0-3020B	
							Q'TY	APPD:		SCALE	SHEET
										1:1	1/1
										REV.	CUSTOMER
										A	DRAWING

②	Earth spring	118213	Phosphor bronze	3	Silver plating
①	Housing		PA10T UL94 V-0	1	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF ACCURATE INNOTECH INC
AND SHALL NOT BE REPRODUCED, COPIED
OR USED IN ANY MANNER WITHOUT THE
PRIOR WRITTEN CONSENT OF ACCURATE
INNOTECH INC.