

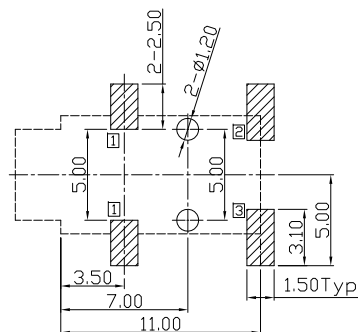
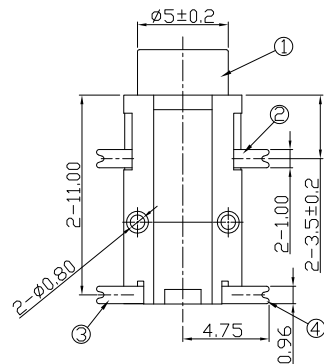




Halogen Free

DIMENSIONS

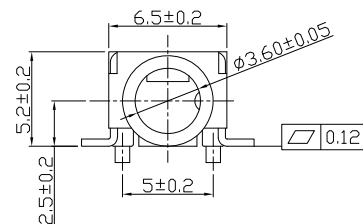


RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(TOP VIEW)

1=Tape reel packing

8. Preservative temperature range: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

Model No.	PJB0-3021A-D	PJB0-3021A-E
Schematic		

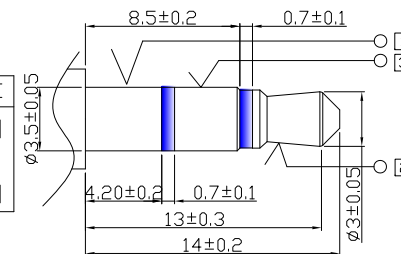

MATCHING PLUG

○: ITEM NO. □: TERMINAL NO.

						TOLERANCE	ANGLES	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.							
						.X ±0.38	X.' ±5°	MAT'L	SEE NOTE	TITLE: SMD 3.5MM PHONE JACK		PART NO.: PJB0-3021A				
						.XX ±0.30	.X' ±3°	FINISH		DR: Ricky 2025/06/13	DWG NO.: AB0-3021A					
						.XXX ±0.15	.XX' ±2°	SEE NOTE		CHKD: Ricky 2025/06/13	SCALE	SHEET	REV.	CUSTOMER		
								Q'TY		APPD:		1:1	1/1	A	DRAWING	
④	Ring spring	③	Phosphor bronze t=0.2	1	Silver plating											
③	Tip spring	②	Copper Alloy t=0.4	1	Silver plating											
②	Earth spring	①	Copper Alloy t=0.2	1	Silver plating											
①	Housing		HI-TEM.THERMOPLASTIC	1	Black											
NO.	PARTS		MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.										