





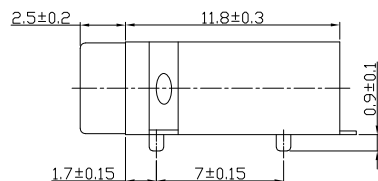


Halogen Free

DIMENSIONS



RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(TOP VIEW)



MODEL CODE:


PJB0-30260-□ 10 BK S 00 1
(1) (2)(3) (4) (5)(6)(7)

(1):Series No.
(2):Schematic option:D,E
(3):Material of housing:
9T=PA9T
10=PA10T
(4):Housing color:
BK=Black
(5):Terminal plating:
S=Silver(Ag)
(6):Special option:
00=No special option
(7):Packing mode:
1=Reel packing

SPECIFICATION:

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: $\leq 30\text{m}\Omega$
After test: $\leq 50\text{m}\Omega$
- 3.Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC);
After test: $\geq 50\text{M}\Omega$
- 4.Withstand voltage: 500VAC;
- 5.Insertion and extraction force: 3N~30N;
- 6.life test: 5000cycles min;
- 7.Operation temperature range: $-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$
- 8.Preservative temperature range: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$

Model No.	PJB0-30260-D	PJB0-30260-E
Schematic		

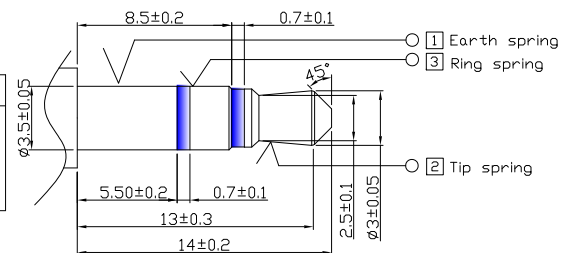

MATCHING PLUG

○: ITEM NO. □: TERMINAL NO.

					TOLERANCE	ANGLES	UNITS mm	雅 安 科 技 有 限 公 司 ACCURATE INNOTECH INC.				
					±0.3	±2°	MAT'L					
							SEE NOTE	DR: <i>Ricky</i> 2025/06/13	DWG NO.: AB0-30260			
							FINISH	CHKD: <i>Ricky</i> 2025/06/13	SCALE	SHEET	REV.	CUSTOMER
							SEE NOTE	APPD:	1:1	1/1	A	DRAWING
							Q'TY					
③	Tip spring	Phosphor bronze t=0.2	1	Silver plating	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							
②	Earth spring	Phosphor bronze t=0.25	2	Silver plating								
①	Housing	High temperature plastic	1	Black								
NO.	PARTS	MATERIAL	Q'TY	FINISHING								