

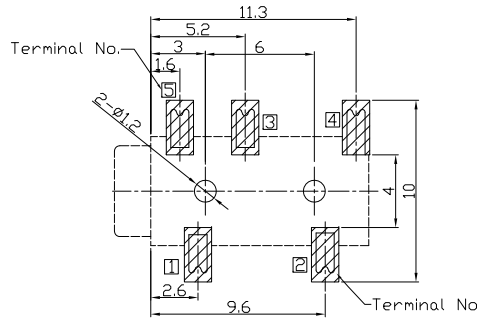




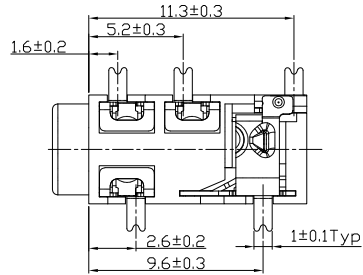

RoHS
Compliant
2002/95/EC


REV.	ECN.	NO.	APPD.

DIMENSIONS



RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(TOP VIEW)

Model No.	PJB0-3027A-B	PJB0-3027A-C	PJB0-3027A-D
Schematic			
Model No.	PJB0-3027A-K	PJB0-3027A-P	PJB0-3027A-L
Schematic			

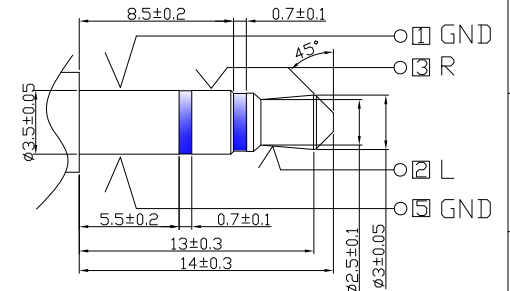

MATCHING PLUG

○: ITEM NO. □: TERMINAL NO.

					TOLERANCE	ANGLES	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
					±0.3	±2°	MAT'L	TITLE:		PART NO.:			
							SEE NOTE	SMD 3.5MM PHONE JACK		PJB0-3027A			
④	Shunt terminal	④	Copper Alloy t=0.25	1	Silver/gold plating	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	FINISH	DR:		DWG NO.:			
③	Tip spring	②	Copper Alloy t=0.25	1	Silver/gold plating		SEE NOTE	Ricky 2025/06/13		AB0-3027A			
②	Ring spring	①③⑤	Copper alloy t=0.2	3	Silver/gold plating		Q'TY	CHKD:					
①	Housing		Hi-Tem. Thermoplastic	1	Black			APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
NO.	PARTS		MATERIAL	Q'TY	FINISHING					1:1	1/1	A	
	1		2	3	4	5	6	7					