

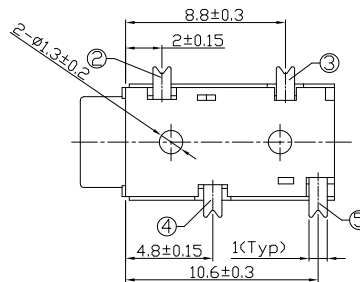
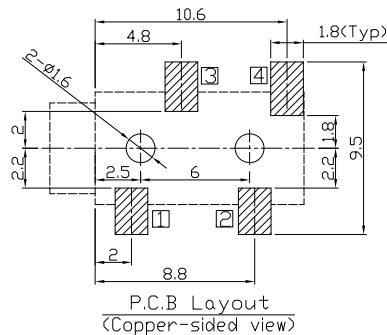


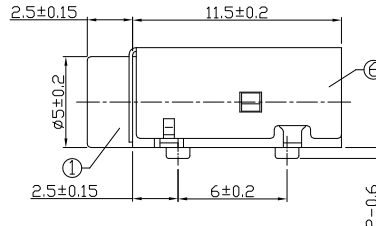

RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS



MODEL CODE:

PJB0-3027H-□ 10 BK S 00 1
(1) (2) (3) (4) (5) (6) (7)

(1):Series No.

(2):Schematic option:B,C,D

(3):Material of housing:

10=PA10T

(4):Housing color:

BK=Black

2L=Pink(701C/405)

5G=Lime(577C/406)

(5):Terminal plating:

S=Silver(Ag)

G=Gold(Au)

(6):Special option:

00=No special opion

(7):Packing mode:

1=Reel packing

SPECIFICATION:

1.Rating : DC 30V 0.5A;

2.Contact resistance: ≤50mΩ;

After test: ≤100mΩ

3.Insulation resistance: ≥100MΩ (500VDC);

After test: ≥50MΩ

4.Withstand voltage:500VAC;


5.Insertion and extraction force: 3N~30N;

6.life test: 5000cycles min;

7.□peration temperature range: -20℃~70℃

8.Preservative temperature range: -40℃~85℃

Model No.	PJB0-3027H-B	PJB0-3027H-C	PJB0-3027H-D
Schematic			

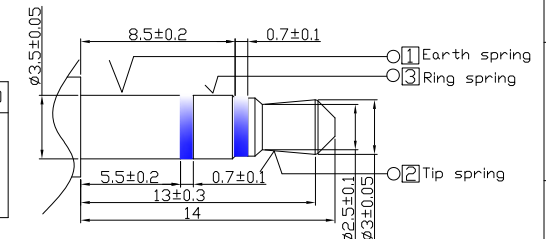

MATCHING PLUG

○: ITEM NO. □: TERMINAL NO.

					TOLERANCE	ANGLES	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
					±0.3	±2°	MAT'L	TITLE:		PART NO.:			
							SEE NOTE	SMD 3.5MM PHONE JACK		PJB0-3027H			
							FINISH	DR:		DWG NO.:			
							SEE NOTE	2025/06/13		AB0-3027H			
							Q'TY	CHKD:					
								2025/06/13					
								APPD:		SCALE	SHEET	REV.	CUSTOMER
										1:1	1/1	A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF ACCURATE INNOTECH INC.
AND SHALL NOT BE REPRODUCED, COPIED
OR USED IN ANY MANNER WITHOUT THE
PRIOR WRITTEN CONSENT OF ACCURATE
INNOTECH INC.