

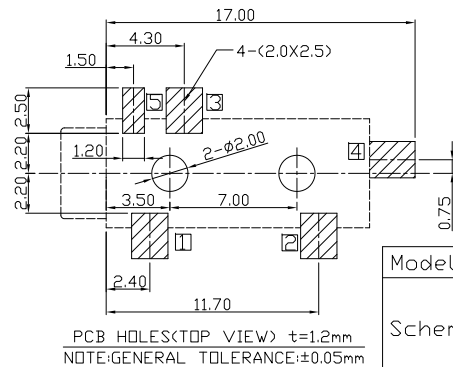
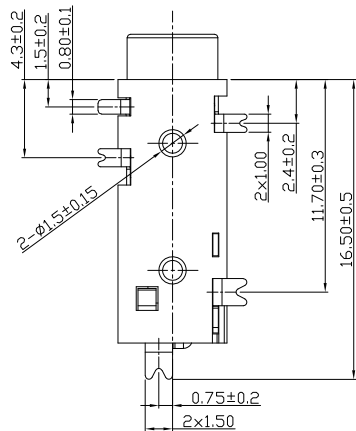


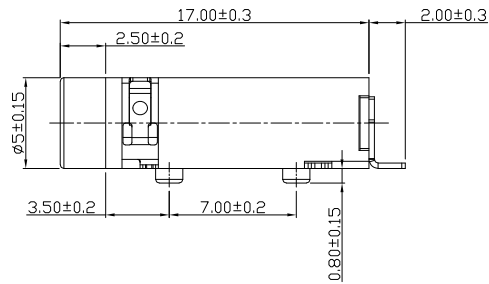

RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS




MODEL CODE:

PJB0-30280-□ 10 BK S 00 1
(1) (2)(3) (4) (5)(6)(7)


- (1): Series No.
(2): Schematic option: A, B, C, D, E, F
(3): Material of housing:
9T=PA9T
10=PA10T
(4): Housing color:
BK=Black
2L=Plink(701C)
5U=Green
5G=Lime(577C)
6A=Blue
(5): Terminal plating:
S=Silver(Ag)
G=Gold Flash(Au)
(6): Special option:
00=No special option
0H=Halogen Free
(7): Packing mode:
1=Tape reel packing

SPECIFICATION:

1. Rating: DC 30V 0.5A;
2. Contact resistance: ≤50mΩ;
After test: ≤100mΩ
3. Insulation resistance: ≥100MΩ (500VDC);
After test: ≥50MΩ
4. Withstand voltage: 500VAC;
5. Insertion and extraction force: 3N~30N;
6. Life test: 5000cycles min;
7. Operation temperature range: -20℃~70℃
8. Preservative temperature range: -40℃~85℃



Model No.	PJB0-30280-A	PJB0-30280-B	PJB0-30280-C
Schematic			
Model No.	PJB0-30280-D	PJB0-30280-E	PJB0-30280-F
Schematic			

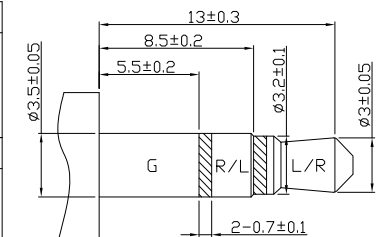

○: ITEM NO. □: TERMINAL NO.

				TOLERANCE	ANGLES	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
⑦	Shunt terminal	⑤	Phosphor bronze t=0.2	1	See P/N ordering info	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	MAT'L	TITLE: SMD 3.5MM PHONE JACK	PART NO.: PJB0-30280			
⑥	Shunt terminal	④	Brass t=0.3	1								
⑤	Ring spring	③	Stainless steel t=0.2	1			Q'TY	DR: Ricky 2025/06/13	DWG NO.: AB0-30280			
④	Tip spring	②	Phosphor bronze t=0.3	1								
③	Earth spring	①	Stainless steel t=0.2	1			Q'TY	APPD:				
②	Cover		HI-TEM.THERMOPLASTIC	1	Q'TY	APPD:						
①	Housing		HI-TEM.THERMOPLASTIC	1			Q'TY	APPD:				
NO.	PARTS	MATERIAL	Q'TY	FINISHING					CUSTOMER DRAWING			