

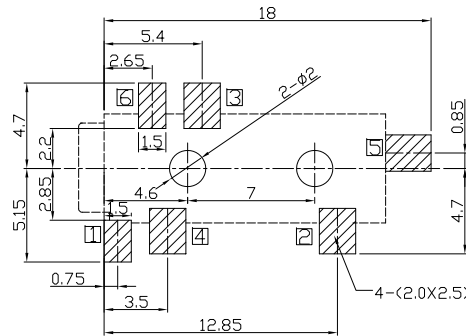
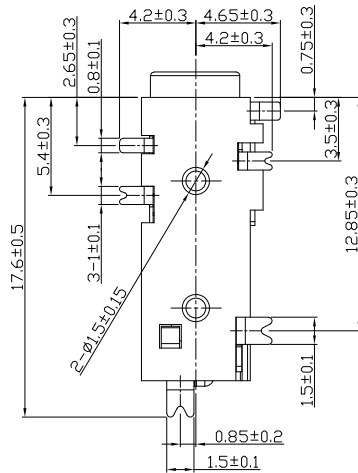


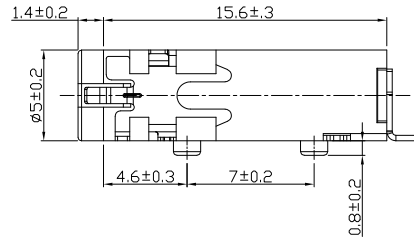

RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS




P.C.B Layout
(Copper-sided view)

MODEL CODE:
PJB0-3028B-□ 10 BK S 00 1
(1) (2)(3) (4) (5)(6)(7)


- (1):Series No.
(2):Schematic option:I,K,J,M,A,D,N,H
(3):Material of housing:
9T=PA9T
10=PA10T
(4):Housing color:
BK=Black
2K=Pink<701C=XH1189>
5G=Lime<577C=XH1190>
5U=Green<PA9T/346C/XH1242>
6A=Blue<PA9T/2726C/XH1243>
91=Gley White<#F5F5F5=10004>
(5):Terminal plating:
S=Silver<Ag>
G=Gold Flash
(6):Special option:
00=No special opion
(7):Packing mode:
1=Tape reel packing

SPECIFICATION:

- 1.Rating : DC 30V 0.5A;
2.Contact resistance: ≤50mΩ;
After test: ≤100mΩ
3.Insulation resistance: ≥100MΩ (500VDC);
After test: ≥50MΩ
4.Withstand voltage:500VAC;
5.Insertion and extraction force: 3N~30N;
6.life test: 5000cycles min;
7.Operation temperature range: -20℃~70℃
8.Preservative temperature range: -40℃~85℃

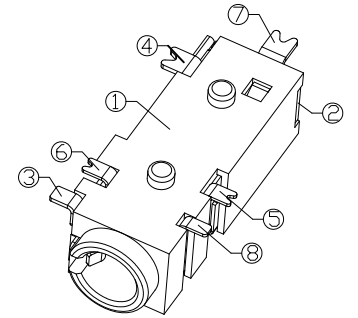

Model No.	PJB0-3028B-I	PJB0-3028B-K	PJB0-3028B-J	PJB0-3028B-M
Schematic				
Model No.	PJB0-3028B-A	PJB0-3028B-D	PJB0-3028B-N	PJB0-3028B-H
Schematic				

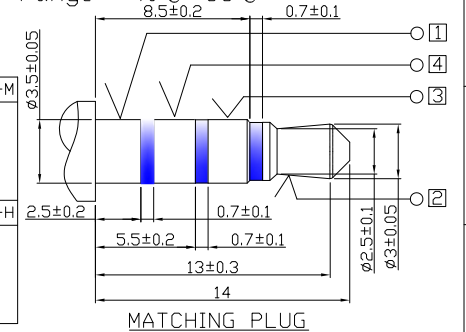

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS	雅安科技有限公司 ACCURATE INNOTECH INC.			
					±0.3	±2°	mm				
8	Shunt terminal	Phosphor bronze t=0.2	1	Silver/Gold plating			MAT'L	TITLE: SMD 3.5MM PHONE JACK	PART NO.: PJB0-3028B		
7	Shunt terminal	Brass t=0.3	1				SEE NOTE				
6	Ring spring	Stainless steel t=0.2	1				FINISH	DR: Ricky 2025/06/13	DWG NO.: AB0-3028B		
5	Ring spring	Stainless steel t=0.2	1				SEE NOTE				
4	Tip spring	Phosphor bronze t=0.3	1				Q'TY	CHKD: Ricky 2025/06/13	SCALE: 1:1 SHEET: 1/1 REV: A CUSTOMER: DRAWING		
3	Earth spring	Phosphor bronze t=0.25	1					APPD:			
2	Cover	PA9T/PA10T UL 94V-0	1								
1	Housing	PA9T/PA10T UL 94V-0	1								

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.