

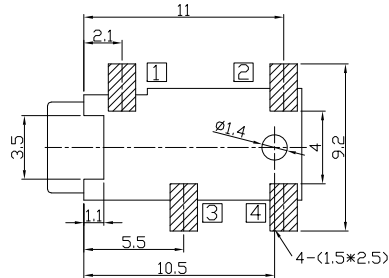





RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS



RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(COPPER-SIDED VIEW)

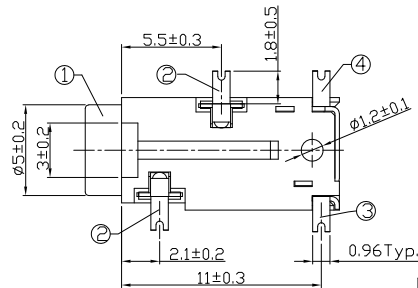

MODEL CODE:


PJB0-30810-□ 10 BK S 00 1
(1) (2) (3) (4) (5) (6) (7)

- (1):Series No.
(2):Schematic option:B,D
(3):Material of housing:
9T=PA9T
10=PA10T
(4):Housing color:
BK=Black(Standard)
(5):Terminal plating:
S=Silver(Ag)(Standard)
G=Gold(Au)
(6):Special option:
00=No special opion
(7):Packing mode:
1=Tape reel packing

SPECIFICATION:

- 1.Rating : DC 30V 0.5A;
2.Contact resistance: ≤30mΩ;
After test: ≤50mΩ
3.Insulation resistance: ≥100MΩ (500VDC);
After test: ≥50MΩ
4.Withstand voltage:500VAC;
5.Insertion and extraction force: 3N~30N;
6.life test: 5000cycles min;
7.□peration temperature range: -20℃~70℃
8.Preservative temperature range: -40℃~85℃

Model No.	PJB0-30810-B	PJB0-30810-D
Schematic		

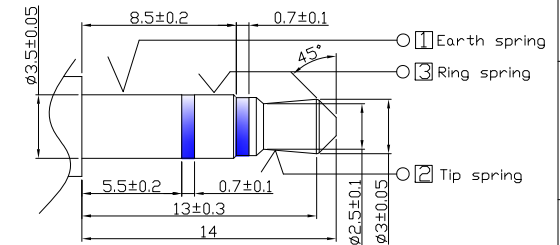

MATCHING PLUG

○: ITEM NO. □: TERMINAL NO.

					TOLERANCE	ANGLES	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
					±0.25	±2°	MAT'L SEE NOTE	TITLE: SMD 3.5MM PHONE JACK		PART NO.: PJB0-30810			
							FINISH SEE NOTE	DR: Ricky 2025/06/13		DWG NO.: AB0-30810			
							Q'TY	CHKD: Ricky 2025/06/13		SCALE	SHEET	REV.	CUSTOMER
④	Shunt terminal	④	Brass t=0.25	1	Silver/Gold plating	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		APPD:		1:1	1/1	A	DRAWING
③	Tip spring	②	Beryllium bronze t=0.25	1	Silver/Gold plating								
②	Ring spring	①&③	Phosphor bronze t=0.2	2	Silver/Gold plating								
①	Housing		HI-TEM.THERMOPLASTIC	1	Black								
NO.	PARTS		MATERIAL	Q'TY	FINISHING								