



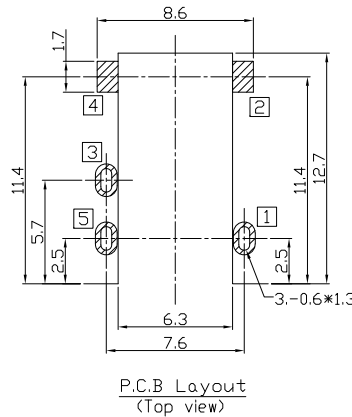





RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS



(Top view)

P.C.B, t=1.0mm

MODEL CODE:


PJB0-31560-□ 10 BK S 00 1

(1) (2)(3) (4) (5)(6) (7)


- (1):Series No.
(2):Schematic option:J,N
(3):Material of housing:
10=PA10T
(4):Housing color:
BK=Black
(5):Terminal plating:
S=Silver(Ag)
G=Gold(Au)
(6):Special option:
00=No special option
0H=Halogen Free
(7):Packing mode:
1=Tape reel packing

SPECIFICATION:

- 1.Rating : DC 30V 0.5A;
2.Contact resistance: ≤30mΩ;
After test: ≤50mΩ
3.Insulation resistance: ≥100MΩ (500VDC);
After test: ≥50MΩ
4.Withstand voltage:500VAC;
5.Insertion and extraction force: 3N~30N;
6.life test: 5000cycles min;
7.Operation temperature range: -20℃~70℃
8.Preservative temperature range: -40℃~85℃

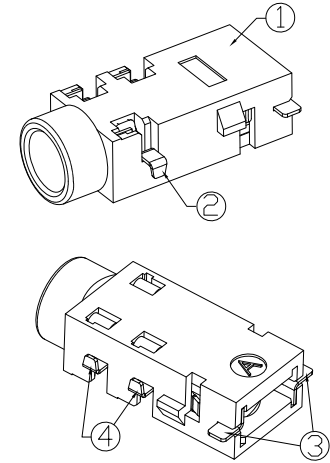

Model No.	PJB0-31560-J	PJB0-31560-N
Schematic		

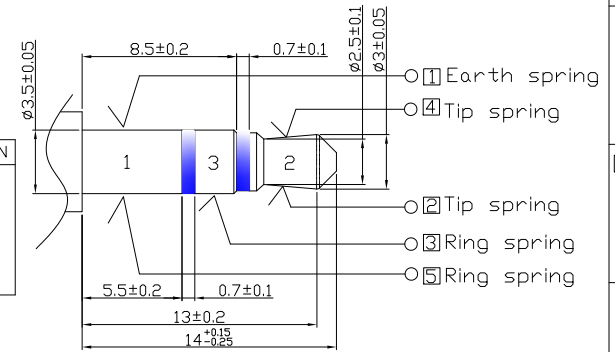

MATCHING PLUG

○: ITEM NO. □: TERMINAL NO.

				TOLERANCE	ANGLES	UNITS	雅安科技有限公司 ACCURATE INNOTECH INC.			
				±0.25	±2°	mm				
						MAT'L	TITLE:		PART NO.:	
						SEE NOTE	SMD 3.5MM PHONE JACK		PJB0-31560	
						FINISH	DR: Ricky 2025/06/13		DWG NO.:	
						SEE NOTE	CHKD: Ricky 2025/06/13		AB0-31560	
						Q'TY	APPD:		SCALE	SHEET
									1:1	1/1
									REV.	CUSTOMER
									A	DRAWING

NO.	PARTS	MATERIAL	Q'TY	FINISHING
④	Ring spring	Phosphor bronze t=0.2	2	Refer to part number list
③	Tip spring	Phosphor bronze t=0.2	2	
②	Earth spring	Phosphor bronze t=0.2	1	
①	Housing	High temperature resistant plastic	1	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.