


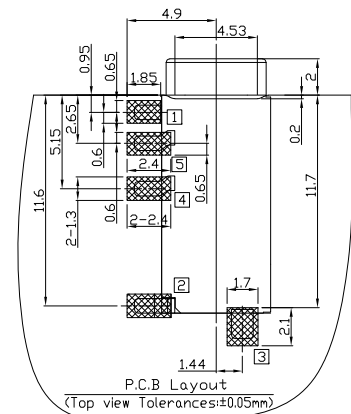


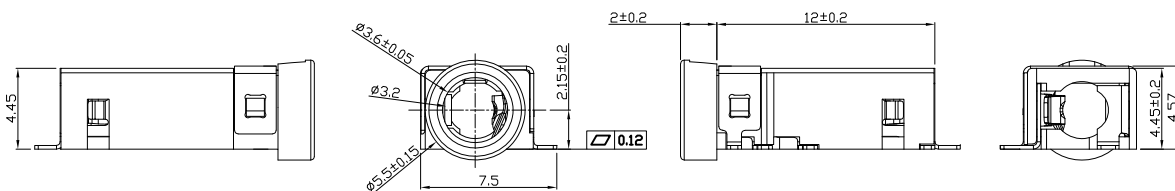

RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS



○: ITEM NO. □: TERMINAL NO.

MODEL CODE:

PJB0-3191C-K 10 BK G 0H B

(1) (2) (3) (4) (5) (6) (7)

(1):Series No.

(2):Schematic option:K

(3):Material of housing:

10=PA10T(Standard)

(4):Housing color:

BK=Black

(5): Terminal plating:

G=Gold(Au)

(6):Special option:

0H=Halogen Free material

```
(7):Packing mode:
```

```
B=Tape reel packing(Special carriver)
```

SPECIFICATION:

1.Rating : DC 30V 0.5A;

2.Contact resistance: $\leq 30\text{m}\Omega$;

After test: $\leq 50\text{m}\Omega$

3. Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC);

After test: $\geq 50\text{M}\Omega$




4. Withstand voltage: 500VAC;

5. Insertion and extraction force: 3N~30N;

6.life test: 5000cycles min;

7. Operation temperature range: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$

8. Preservative temperature range: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$

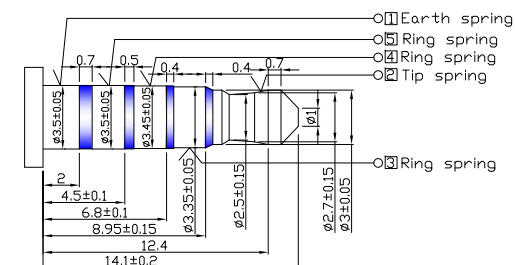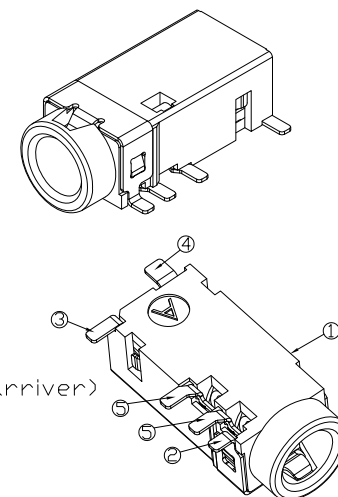

MATCHING PLUG

						TOLERANCE	ANGLES	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
						±0.30	±2°	MAT'L	TITLE: SMD 3.5MM PHONE JACK		PART NO.: PJB0-3191C		
								SEE NOTE	DR: <i>Ricky</i> 2025/06/17		DWG NO.: AB0-3191C		
								FINISH	CHKD: <i>Ricky</i> 2025/06/17		SCALE SHEET REV. CUSTOMER		
								SEE NOTE	APPD:		1:1 1/1 A DRAWING		
								Q'TY					
⑤	Ring spring	4	Phosphor bronze t=0.2	2	Gold flash	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							
④	Ring spring	3	Phosphor bronze t=0.2	1									
③	Tip spring	2	Phosphor bronze t=0.2	1									
②	Earth spring	1	Phosphor bronze t=0.2	1									
①	Housing		PA10T UL-94V-0	1									
NO.	PARTS		MATERIAL		Q'TY	FINISHING							