



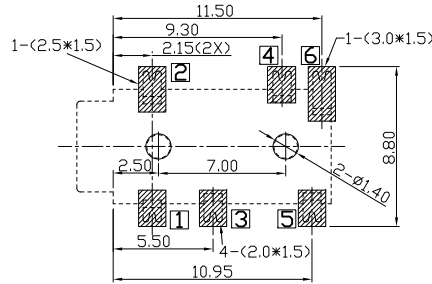





RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS

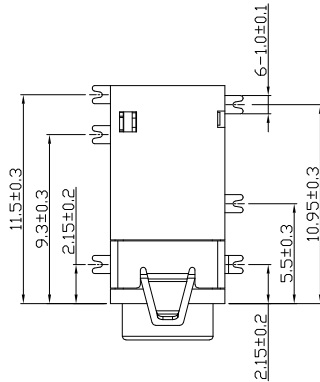

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(TOP VIEW)

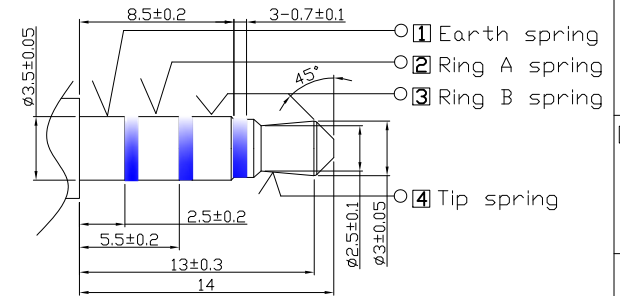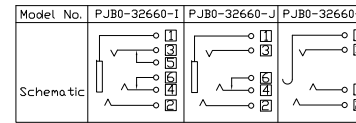

MATCHING PLUG

MODEL CODE:

PJB0-32660-□ 10 BK S 00 1

(1) (2)(3) (4) (5)(6)(7)

(1):Series No.

(2):Schematic option: I,J,M

(3):Material of housing:

LC=LCP

10=PA10T

(4):Housing color:

BK=Black

(5):Terminal plating:

S=Ag(8u")

G=Au

(6):Special option:

00=No special option

(7):Packing mode:

1=Tape reel packing

SPECIFICATION:

1.Rating : DC 30V 0.5A;

2.Contact resistance: ≤50mΩ;

After test: ≤100mΩ

3.Insulation resistance: ≥100MΩ (500VDC);

After test: ≥50MΩ

4.Withstand voltage:500VAC;

5.Insertion and extraction force: 3N~30N

6.life test: 5000cycles min;

7.Operation temperature range: -20℃~70℃

8.Preservative temperature range: -40℃~85℃

○: ITEM NO. □: TERMINAL NO.

					TOLERANCE		ANGLES		UNITS mm		雅安科技有限公司 ACCURATE INNOTECH INC.				
⑦	Housing		LCP G930/PA10T UL94 V-0	1	BLACK	.X	±0.30	X.*	±3°	MAT'L	TITLE: SMD 3.5MM PHONE JACK		PART NO.: PJB0-32660		
⑥	Shunt terminal	⑤	PHOSPHONR BRONZE T=0.2	1	See P/N	.XX	±0.15	.X*	±2°	SEE NOTE					
⑤	Shunt terminal	⑤	PHOSPHONR BRONZE T=0.2	1		.XXX	±0.10	.XX*	±1°	FINISH					
④	Tip spring	④	PHOSPHONR BRONZE T=0.2	1		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				SEE NOTE					
③	Ring B spring	③	PHOSPHONR BRONZE T=0.2	1											
②	Ring A spring	②	PHOSPHONR BRONZE T=0.2	1					Q'TY	CHKD: <i>Ricky</i> 2025/06/17	DWG NO.: AB0-32660				
①	Earth spring	①	PHOSPHONR BRONZE T=0.2	1											
NO.	PARTS		MATERIAL	Q'TY	FINISHING					APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
												1:1	1/1	A	