




Halogen Free


DIMENSIONS

Model No.	PJB0-3281B-A	PJB0-3281B-B	PJB0-3281B-D	PJB0-3281B-K
Schematic				
Model No.	PJB0-3281B-F	PJB0-3281B-I	PJB0-3281B-J	PJB0-3281B-M
Schematic				
Model No.	PJB0-3281B-Q	PJB0-3281B-R	PJB0-3281B-S	PJB0-3281B-U
Schematic				
Model No.	PJB0-3281B-P	PJB0-3281B-Y	PJB0-3281B-H	PJB0-3281B-T
Schematic				
Model No.	PJB0-3281B-L			
Schematic				


○: ITEM NO. □: TERMINAL NO.

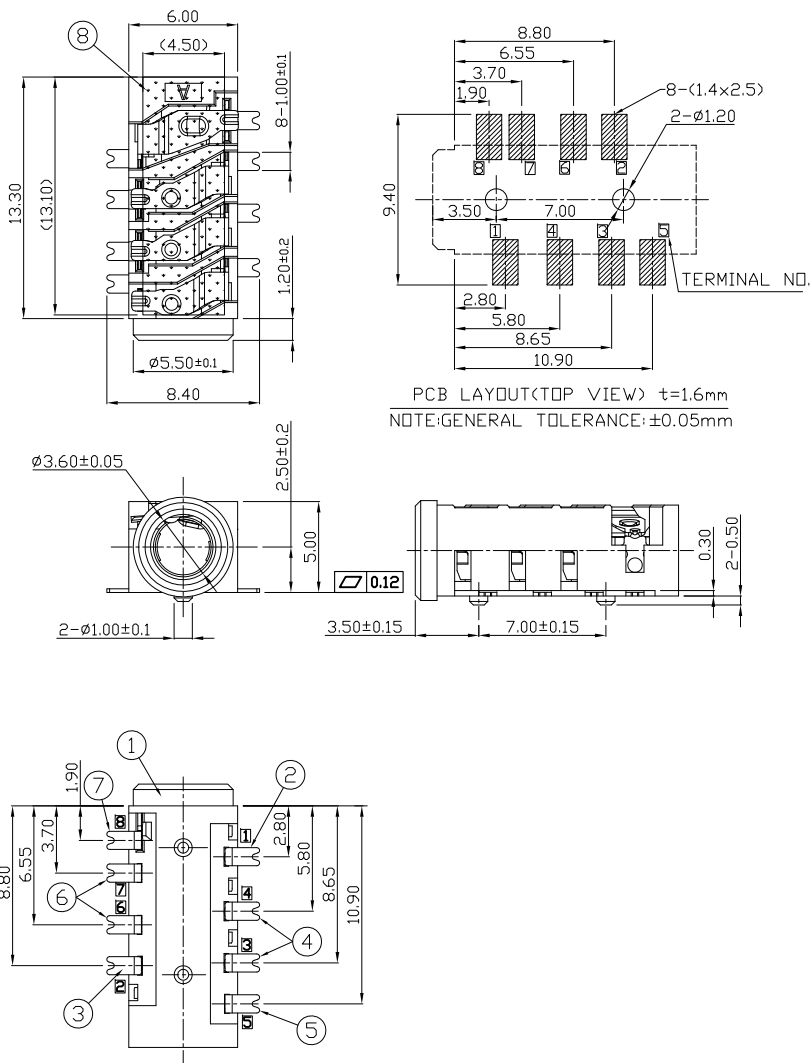


1=Tape reel packing



8. Preservative temperature range: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

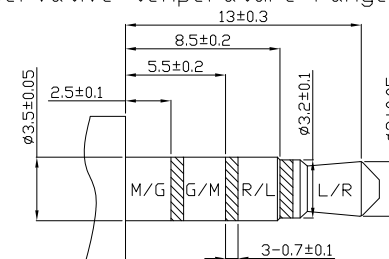

MATCHING PLUG

				TOLERANCE	ANGLES	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.								
⑧	Mylar	Polyimide	1	Silver plating/ Gold plating	.X ±0.50	X' ±5°	MAT'L SEE NOTE	TITLE: SMD 3.5MM PHONE JACK		PART NO.: PJB0-3281B					
⑦	Shunt terminal ⑧	Phosphor bronze t=0.20	1					.XX ±0.30	.X' ±3°	FINISH SEE NOTE	DR: Ricky 2025/06/17		DWG NO.: AB0-3281B		
⑥	Shunt terminal ⑥&⑦	Phosphor bronze t=0.20	2								CHKD: Ricky 2025/06/17				
⑤	Shunt terminal ⑤	Phosphor bronze t=0.20	1		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	.XXX ±0.15	.XX' ±2°	Q'TY 	SCALE		SHEET	REV.	CUSTOMER DRAWING		
④	Ring spring ③&④	Stainless steel t=0.20	2						APPD:		1:1	1/1		A	
③	Tip spring ②	Stainless steel t=0.20	1												
②	Earth spring ①	Stainless steel t=0.20	1												
①	Housing	HIGH TEMP. THERMOPLASTIC	1	GREEN/BLACK/BLUE											
NO.	PARTS	MATERIAL	Q'TY	FINISHING											