



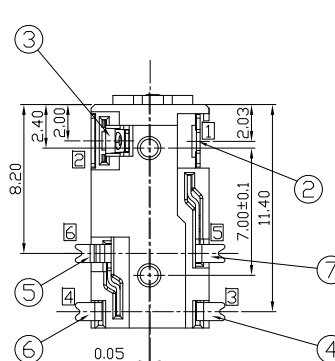


DIMENSIONS

REV.	ECN.	NO.	APPD.

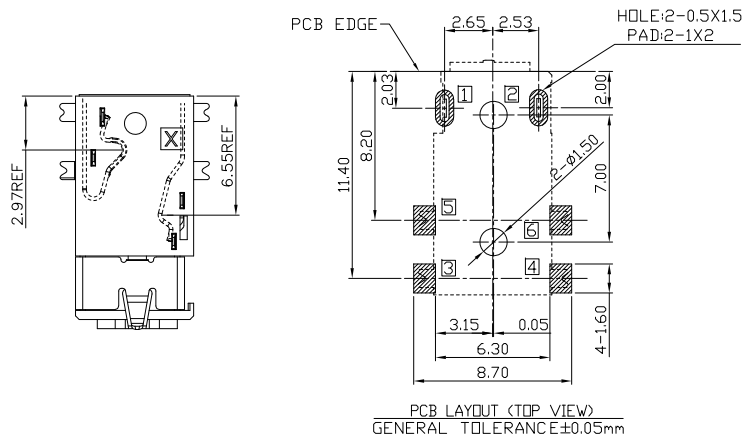




MODEL CODE:
PJB0-32890-I LC BK G 00 1
 (1) (2) (3) (4) (5) (6) (7)

- (1):Series No.
(2):Schematic option: I
(3):Material of housing:
LC=LCP
(4):Housing color:
BK=Black
(5):Terminal plating:
G=Gold(Au)
(6):Special option:
00=No special option
(7):Packing mode:
1=Reel packing



SPECIFICATION:

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 50\text{m}\Omega$
After test: $\leq 100\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC);
After test: $\geq 50\text{M}\Omega$
4. Withstand voltage: 500VAC;
5. Insertion and extraction force: 3N~30N
6. life test: 5000cycles min;
7. Operation temperature range: $-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$
8. Preservative temperature range: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$

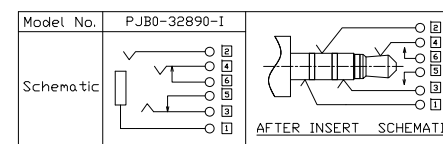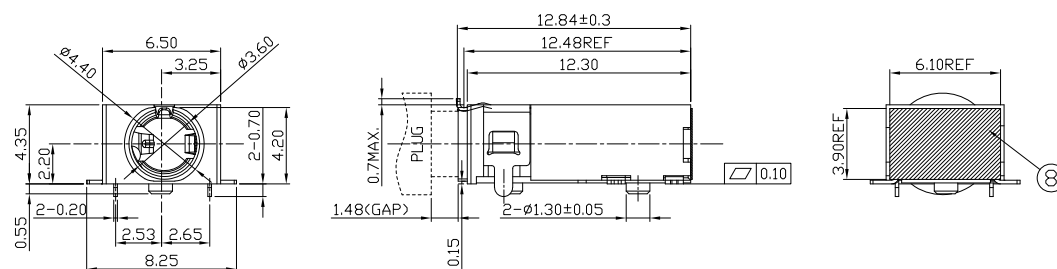

MATCHING PLUG

○: ITEM NO. □: TERMINAL NO.

									雅安科技有限公司 ACCURATE INNOTECH INC.					
⑧	Mylar	T=0.08mm	1	BROWN	TOLERANCE	ANGLES	UNITS mm	MAT'L SEE NOTE	TITLE: SMD 3.5MM PHONE JACK		PART NO.: PJB0-32890			
⑦	Contact	⑤ C5191 T=0.20mm	1	Au 1u*Min Plated ON CONTACT AREA; Au 0.3u*Min Plated ON SOLDER AREA; ALL OVER Ni 40u*Min underplated.	.X ±0.30	X.' ±3'	FINISH SEE NOTE		DR: Ricky 2025/06/17		DWG NO.: ABO-32890			
⑥	Contact	④ C5210 T=0.20mm	1		.XX ±0.15	.X' ±2'			Q'TY 	CHKD: Ricky 2025/06/17		SCALE	SHEET	REV.
⑤	Contact	⑥ C5191 T=0.20mm	1		.XXX ±0.10	.XX' ±1'		APPD:		1:1	1/1	A		
④	Contact	③ C5210 T=0.20mm	1		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.									
③	Contact	② C5191 T=0.20mm	1		Black UL94V-0									
②	Contact	① C5191 T=0.20mm	1											
①	Housing	LCP	1	FINISHING										
NO.	PARTS	MATERIAL	Q'TY											