









RoHS Compliant
2002/95/EC




Halogen Free

DIMENSIONS

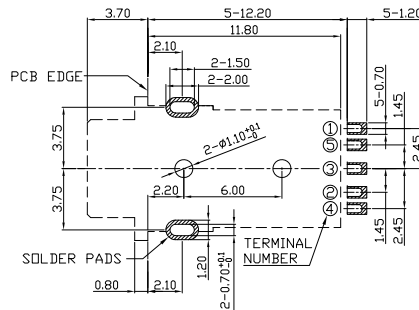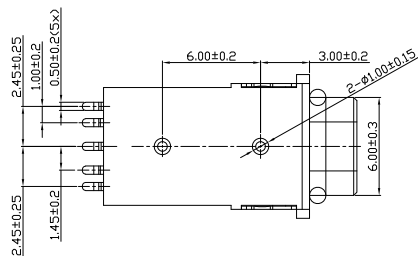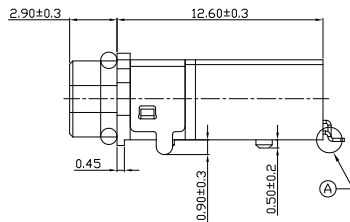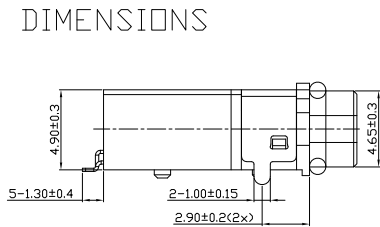


PCB HOLES(TOP VIEW) t=0.8mm
NOTE:GENERAL TOLERANCE:±0.05mm

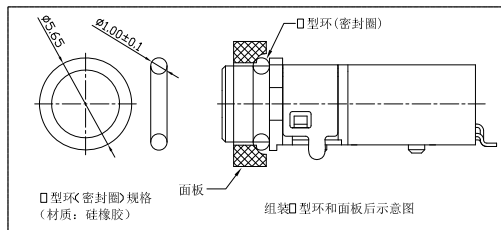

○: ITEM NO. □: TERMINAL NO.




MODEL CODE:
PJB0-33280-K 10 BK G 00 1
(1) (2) (3) (4) (5) (6) (7)

- (1):Series No.
- (2):Schematic option:K
- (3):Material of housing:
10=PA10T
- (4):Housing color:
BK=Black (Standard)
- (5):Terminal plating:
G=Gold(Au)
- (6):Special option:
00=No special option
- (7):Packing mode:
1=Reel packing



SPECIFICATION:

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: ≤100mΩ;
After test:≤100mΩ
- 3.Insulation resistance: ≥100MΩ (500VDC);
After test:≥50MΩ
- 4.Withstand voltage: 500VAC ;
- 5.Initial Insertion and extraction force:
3N~30N;
- 6.life test: 5000cycles;
- 7.Operate temperature range:-20℃~70℃
- 8.Preservative temperature range:-40℃~85℃
- 9.After unpacking, storage condition:
less than or equal to 30℃/ 60%RH 24 hours
workshop life
- 10.Without nut assembled onto Audio jack



NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS	MAT'L
⑧	Contact 5#	C5210	1	Gold Flash	.X ±0.50	X.' ±5'	mm	SEE NOTE
⑦	Contact 4#	C5210	1	Gold Flash	.XX ±0.30	.X.' ±3'		SEE NOTE
⑥	Contact 3#	C5210	1	Gold Flash	.XXX ±0.15	.XX.' ±2'		SEE NOTE
⑤	Contact 2#	C5210	1	Gold Flash	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY
④	Contact 1#	C5210	1	Gold Flash				
③	SHIELD	C5191	1	Ni40u" 以上				
②	Cover	HI-TEM.THERMOPLASTIC	1	Black				
①	Housing Body	HI-TEM.THERMOPLASTIC	1	Black				

雅安科技有限公司 ACCURATE INNOTECH INC.			
TITLE: WATERPROOF SMD 3.5MM PHONE JACK		PART NO.: PJB0-33280	
DR: Ricky 2026/05/13		DWG NO.: AB0-33280	
CHKD: Ricky 2026/05/13		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		A	