

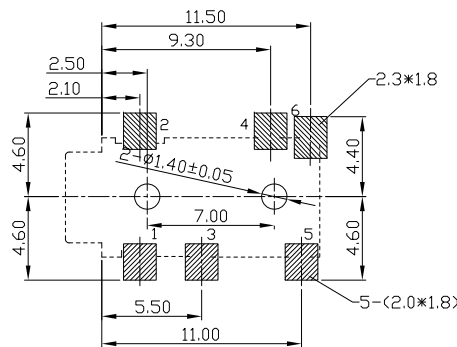
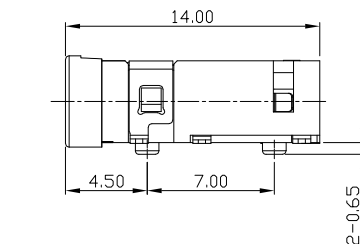






RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS



P.C.B LAYOUT
TOP VIEW



3D VIEW

MODEL CODE:


PJS0-30600- I 9T BK G 00 1
(1) (2)(3) (4) (5)(6) (7)

- (1):Series No
(2):Schematic option: I
(3):Material of housing:
9T=PA9T
(4):Housing color:
BK=Black
(5):Terminal plating:
G=Gold(Au)
(6):Special option:
00=No special option
(7):Packing mode:
1=Reel packing

SPECIFICATION :

- 1.Rating : DC 30V 0.5A.
2.Contact resistance : 50mΩ MAX.;
3.Insulation resistance : 100MΩ MIN.;
4.Withstand voltage : 500VAC MIN.;
5.Insertion and extraction force : 3N~30N.
6.life test : 5000 cycles MIN.;
7.Operation temperature range : -20℃~70℃.
8.Preservative temperature range : -40℃~85℃.

Model No.	PJS0-30600-I
SCHEMATIC	



MATCHING PLUG

					X. ±0.25	X' ±3'	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
7	TERMINAL 6#	Brass	1	THE BOTTOM OF THE NICKEL,GOLD PLATING ON SOLDER AREA	.X ±0.20		MAT'L	SEE NOTE	TITLE: SMD 3.5MM PHONE JACK	PART NO.: PJS0-30600			
6	TERMINAL 5#		1		.XX ±0.15								
5	TERMINAL 4#	PHOSPHOR BRONZE	1	NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ,GOLD PLATING ON CONTACT AREA	.XXX ±0.10		FINISH	SEE NOTE	DR: <i>Ricky</i> 2025/06/07	DWG NO.: AS0-30600			
4	TERMINAL 3#		1										
3	TERMINAL 2#	PHOSPHOR BRONZE	1	THE BOTTOM OF THE NICKEL, THE WHOLE GOLD PLATING.	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD: <i>Ricky</i> 2025/06/07	SCALE SHEET REV. CUSTOMER 1:1 1/1 A DRAWING				
2	TERMINAL 1#		1										
1	HOUSING	PA9T	1	COLOR BLACK				APPD:					
NO.	PARTS	MATERIAL	Q'TY	FINISHING									