




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

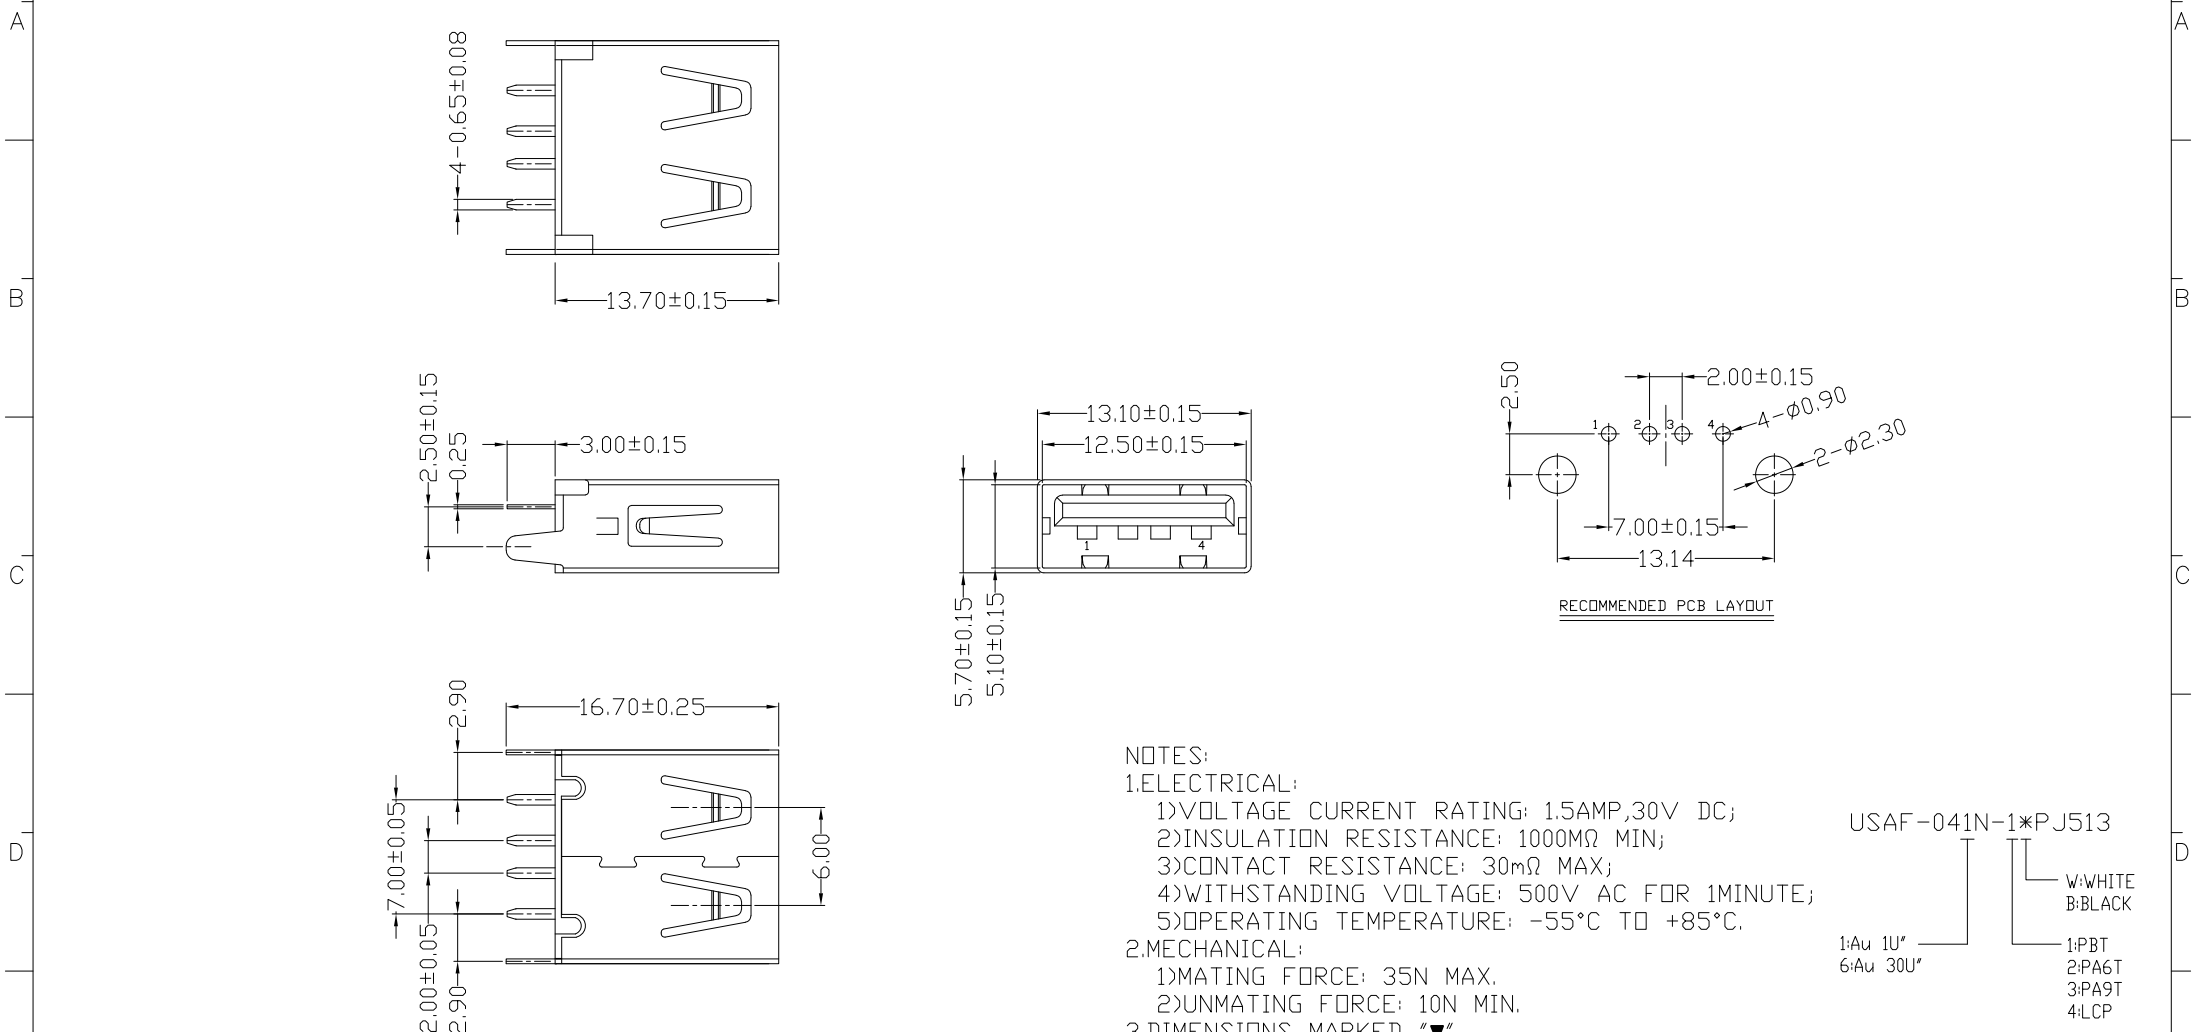

- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 1.5AMP,30V DC;
    - INSULATION RESISTANCE: 1000MΩ MIN;
    - CONTACT RESISTANCE: 30mΩ MAX;
    - WITHSTANDING VOLTAGE: 500V AC FOR 1MINUTE;
    - OPERATING TEMPERATURE: -55°C TO +85°C.
  - MECHANICAL:
    - MATING FORCE: 35N MAX.
    - UNMATING FORCE: 10N MIN.
  - DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

USAF-041N-1\*PJ513

1:Au 1U'  
6:Au 30U'

1:PBT  
2:PA6T  
3:PA9T  
4:LCP

W:WHITE  
B:BLACK

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE	PART NO.:
6					X.	±0.25	X.	±5'
5					.X	±0.20	.X'	±2'
4					.XX	±0.15	.XX'	±1'
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX	±0.10	.XXX'	±0.5'
2	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	DR: <i>Ricky</i> 2026/04/21
1	HOUSING	PBT+30%GF	1				CHKD: <i>Ricky</i> 2026/04/21	AII-PJ513
							APPD:	SCALE SHEET REV. CUSTOMER DRAWING
								1:1 1/1 B

雅安科技有限公司  
ACCURATE INNOTECH INC.

TITLE: USB AF 全包 180度插板式 无边直脚13.7

PART NO.: USAF-04XN-1XPJ513

DR: *Ricky* 2026/04/21

CHKD: *Ricky* 2026/04/21

APPD:

DWG NO.: AII-PJ513

SCALE: 1:1

SHEET: 1/1

REV.: B

CUSTOMER DRAWING