


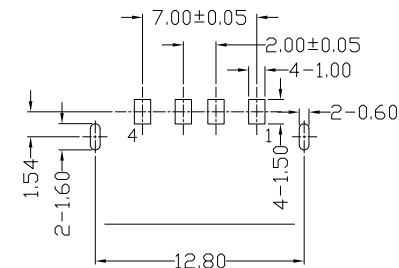





REV.	ECN.	NO.	APPD.



FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)



3.DIMENSIONS MARKED " ▼ "
TO BE CHECKED BY Q.C & IPQC.


— 1:PBT
2:PA6T
3:PA9T
4:LCP


USAF-041N-4XV J560	6.20mm
USAF-041N-4XV J568	6.47mm
USAF-041N-4XV J574	6.80mm
P/N:	Height on board

Bill of materials:

6					X. ±0.25	X.* ±5*	UNITS mm	雅 安 科 技 有 限 公 司 ACCURATE INNOTECH INC.						
5					.X ±0.20	.X* ±2*								MAT'L
4					.XX ±0.15	.XX* ±1*	SEE NOTE	TITLE: USB AF 10.0 有边后两脚 鱼叉方弹 无耳反向贴板	PART NO.: USAF-04XN-4XV J560&68&74					
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.10	.XXX* ±0.5*								FINISH
2	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	DR:	2025/11/14			DWG NO.: AII-V J560&68&74		
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY	CHKD:	2025/11/14					
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:				SCALE	SHEET	REV.

REV.	ECN.	NO.	APPD.




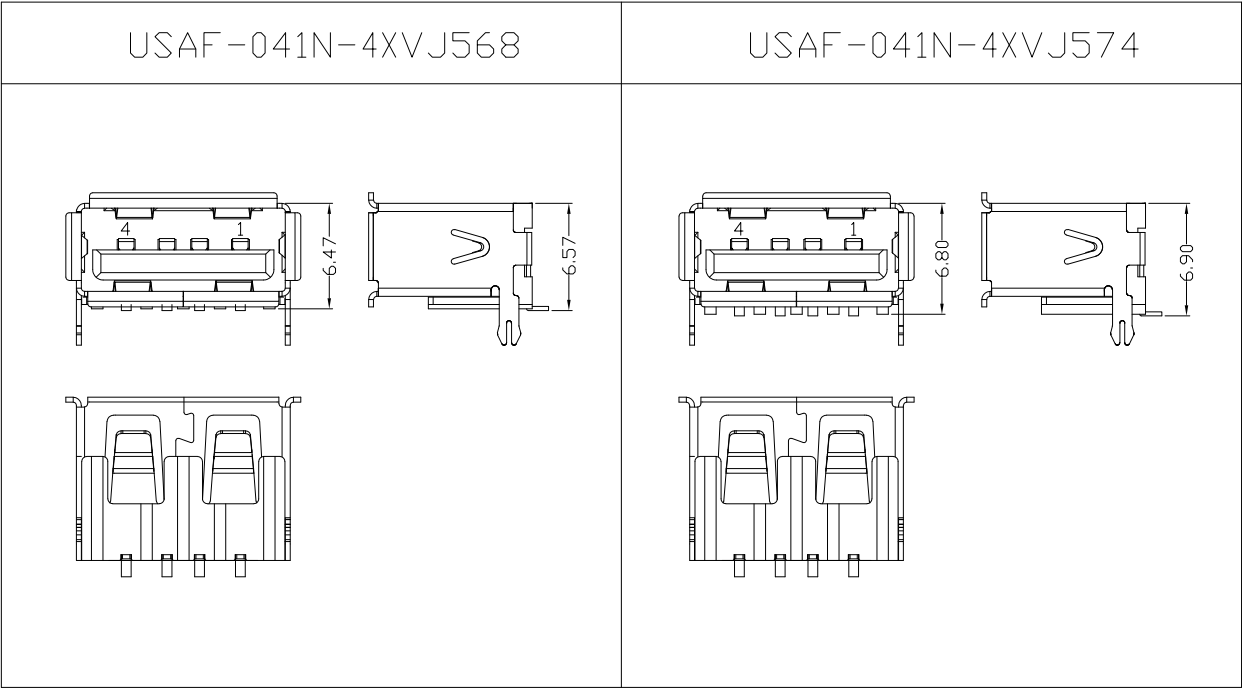


X.	±0.25	X.*	±5*	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
.X	±0.20	.X*	±2*	MAT'L	SEE NOTE				
.XX	±0.15	.XX*	±1*	FINISH	SEE NOTE	TITLE:	USB AF 10.0 有边后两脚 鱼叉方弹 无耳反向贴板		
.XXX	±0.10	.XXX*	±0.5*	Q'TY		DR:	Ricky 2025/11/14		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.						CHKD:	Ricky 2025/11/14		
						APPD:			
							SCALE	SHEET	REV.
							1:1	2/2	B
							CUSTOMER DRAWING		




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

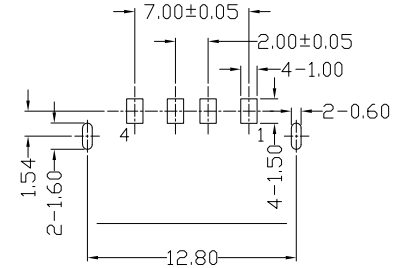

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)



NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING: 1.5AMP,30V DC;
- 2)INSULATION RESISTANCE: 1000MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 500V AC FOR 1MINUTE;
- 5)OPERATING TEMPERATURE: -55°C TO +85°C.

2.MECHANICAL:

- 1)MATING FORCE: 35N MAX.
- 2)UNMATING FORCE: 10N MIN.

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.


USAF-041N-4*VJ5**


1:Au 1U"	W:WHITE	USAF-041N-4XVJ565	6.20mm
6:Au 30U"	B:BLACK	USAF-041N-4XVJ571	6.47mm
	1:PBT	USAF-041N-4XVJ577	6.80mm
	2:PA6T	P/N:	Height on board
	3:PA9T		
	4:LCP		

Bill of materials:

6					X.	±0.25	X.*	±5*	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
5					.X	±0.20	.X*	±2*	MAT'L						
4					.XX	±0.15	.XX*	±1*	SEE NOTE						
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX	±0.10	.XXX*	±0.5*	FINISH		TITLE: USB AF 10.0 无边后两脚 鱼叉方弹 无耳反向贴板	PART NO.: USAF-04XN-4XVJ565&71&77			
2	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				SEE NOTE		DR: Ricky 2025/11/14	DWG NO.: AII-VJ565&71&77			
1	HOUSING	LCP+30%GF	1	UL94V-0					Q'TY		CHKD: Ricky 2025/11/14	SCALE	SHEET	REV.	CUSTOMER DRAWING
NO	PARTS	MATERIAL	QTY	FINISHING						APPD:		1:1	1/2	B	

REV.	ECN.	NO.	APPD.

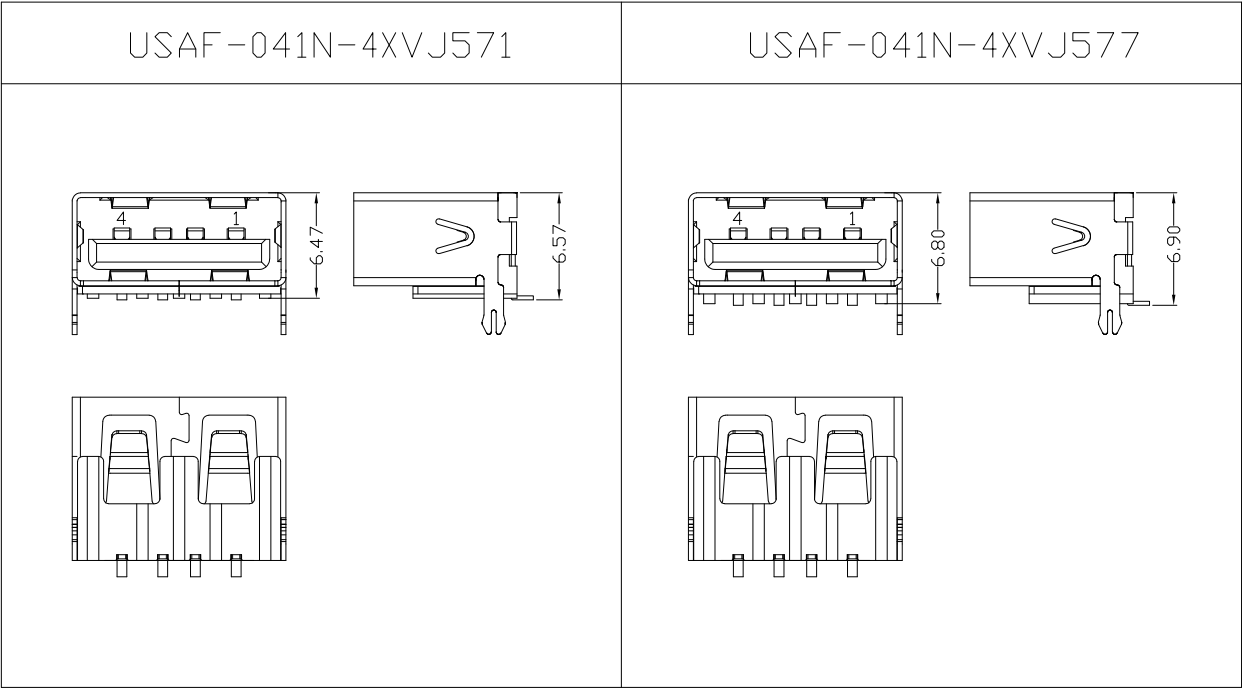

X.	±0.25	X.*	±5*	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
.X	±0.20	.X*	±2*	MAT'L	SEE NOTE				
.XX	±0.15	.XX*	±1*	FINISH	SEE NOTE	TITLE:	USB AF 10.0 无边后两脚 鱼叉方弹 无耳反向贴板		
.XXX	±0.10	.XXX*	±0.5*	Q'TY	SEE NOTE	DR:	Ricky 2025/11/14		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					CHKD:	Ricky 2025/11/14			PART NO.:
						APPD:	AII-VJ565&71&77		
						SCALE	SHEET	REV.	CUSTOMER
						1:1	2/2	B	DRAWING