




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.





CONTACT	A12			A9	A8	A7	A6	A5	A4			A1
DEFINE	GND			VBUS	SUB1	D-	D+	CC	VBUS			GND
CONTACT	B1			B4	B5	B6	B7	B8	B9			B12
DEFINE	GND			VBUS	CC	D+	D-	SUB2	VBUS			GND

焊板2.0系列，料号/贴料说明：

Type C 2.0 DTG
焊板料号：042

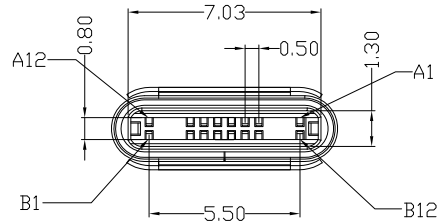

A1.B1.A12.B12.SHELL GND
A4.B4.A9.B9. VBUS
A5 CC
A6 D+
A7 D-

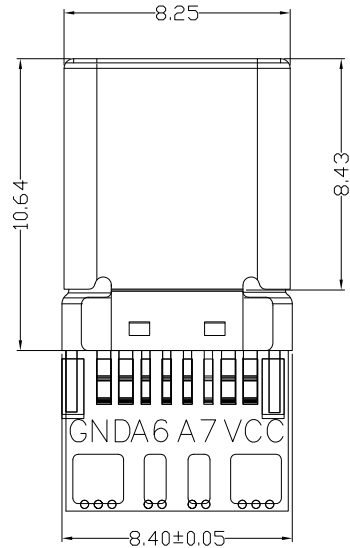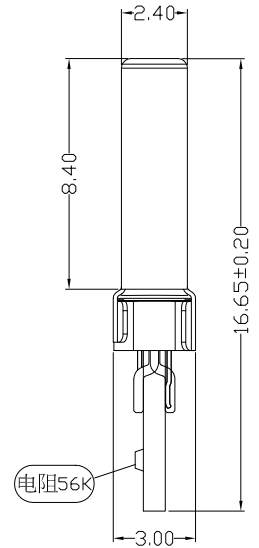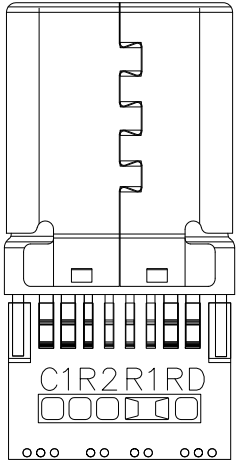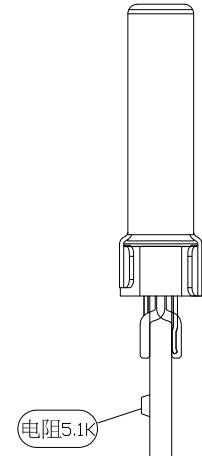

NOTES:
1.ELECTRICAL:
1)CURRENT RATING: 3AMP MAX;
2)INSULATION RESISTANCE: 100MΩ MIN;
3)CONTACT RESISTANCE: 30mΩ MAX;
4)WITHSTANDING VOLTAGE: 250V AC;
5)OPERATING TEMPERATURE:-30°C TO +85°C.
2.Mechanical:
1)Mating Force: 5N~20N
2)Unmating Force: 8N~20N
3)Durability: 10,000 cycles
3.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
USCM-16*MMN-4BSD07-04*
W:WHITE
B:BLACK
1PA9T
2PA6T
3PA9T
4LCP
20n-The-Go
5:3A
1Au 1U*
2Au 3U*
5Au 15u*
6Au 30U*
MNBright nickel
BNBright nickel

5				X.	±0.25	X.*	±3*	UNITS	mm
4	HOOK	STAINLESS STEEL	1	.X	±0.15			MAT'L	
3	SHELL	STAINLESS STEEL	1	.XX	±0.08			SEE NOTE	
2	TERMINAL	COPPER ALLOY	16	.XXX	±0.03			SEE NOTE	
1	HOUSING	LCP+30%GF	1					Q'TY	
NO	PARTS	MATERIAL	QTY						

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

雅安科技有限公司
ACCURATE INNOTECH INC.

TITLE: USB TYPE CM 2.0 16pin
冲压壳

PART NO.: USCM-16XXN-4BSD07-04X

DR: Ricky 2019/08/22

DWG NO.: AII-SD07-04X

CHKD: Ricky 2019/08/22

APPD:

SCALE: 1:1 SHEET: 1/1 REV.: B CUSTOMER DRAWING