


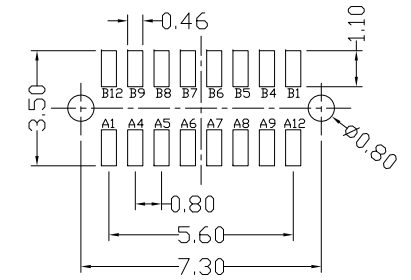
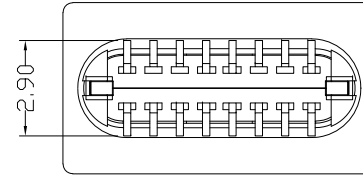
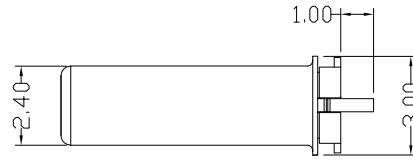
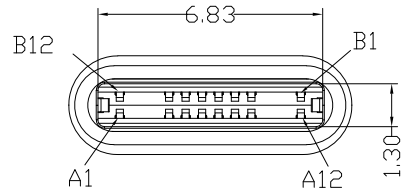



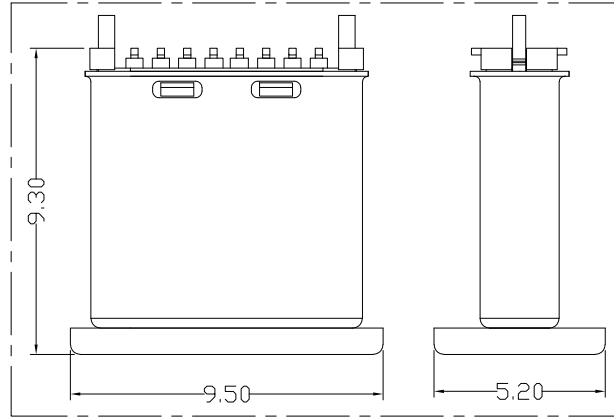

RoHS
Compliant
2002/95/EC

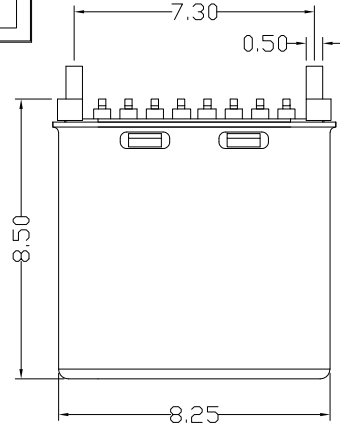

RECOMMENDED P.C.B LAYOUT TOP VIEW
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

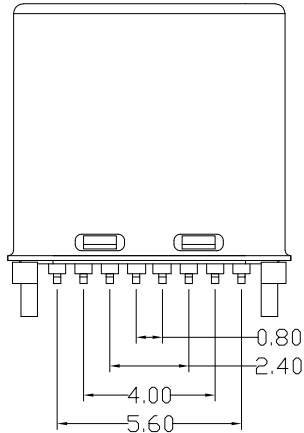

A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

1.ELECTRICAL:

- 1)CURRENT RATING: 3A MAX;
- 2)INSULATION RESISTANCE: 100M Ω MIN; 250V DC.
- 3)CONTACT RESISTANCE: 40m Ω MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC;
- 5)OPERATING TEMPERATURE:-25°C TO +80°C.

2.MECHANICAL:

- 1)MATING FORCE: 20N MAX
- 2)UNMATED FORCE: 6N MIN
- 3)DURABILITY: 10,000 CYCLES

3.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USCM-161N-4BQ61

W:WHITE
B:BLACK
1:Au 1U*
2:Au 3U*
5:Au 15u*
6:Au 30U*
1PBT
2:PA6T
3:PA9T
4:LCP

5	HOOK	STAINLESS STEEL	1	PLATED TIN	.X	± 0.30	.X*	$\pm 2^*$	UNITS	mm
4	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX	± 0.20			MAT'L	
3	TERMINAL	COPPER ALLOY	16	PLATED GOLD/TIN	.XXX	± 0.10			SEE NOTE	
2	CAP	LCP+30%GF	1	UL94V-0					FINISH	
1	HOUSING	LCP+30%GF	1	UL94V-0					SEE NOTE	
NO	PARTS	MATERIAL	QTY	FINISHING					Q'TY	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					

雅安科技有限公司 ACCURATE INNOTECH INC.					
TITLE: USB TYPE CM 拉伸磁吸SMT8.5 卡钩外露1.0 带后塞			PART NO.: USCM-16XN-4BQ61		
DR: Ricky 2025/09/15			DWG NO.: AII-QU61		
CHKD: Ricky 2025/09/15					
APPD:			SCALE 1:1	SHEET 1/1	REV. B
			CUSTOMER DRAWING		