

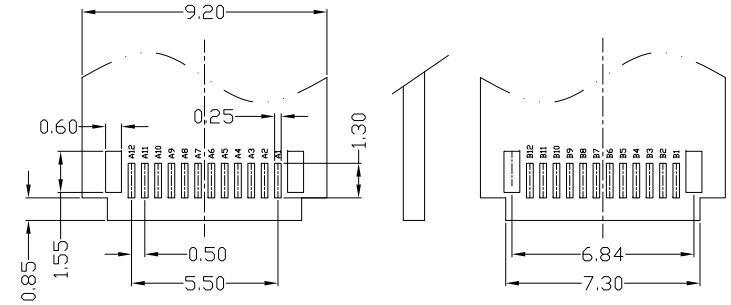



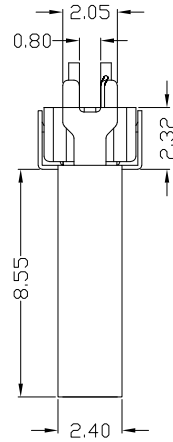


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

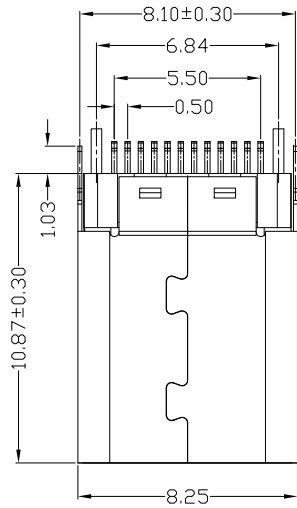

RECOMMENDED P.C.B LAYOUT(Both sides are sample)  
Tolerance:±0.05,Thickness=0.80mm

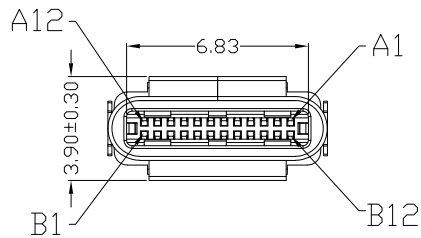

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAMF	PIN	SIGNAL NAMF

NOTES:

1.ELECTRICAL:

- 1)CURRENT RATING: 3A FOR VBUS; 1.25A FOR GND; 0.25A FOR OTHER.
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 40mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC;
- 5)OPERATING TEMPERATURE:-25°C TO +80°C.

2.MECHANICAL:

- 1)MATING FORCE: 5N~20N
- 2)UNMATING FORCE: 8N~20N(INITIAL) 6N~20N(AFTER 10,000 CYCLES) MIN.
- 3)DURABILITY: 10,000 CYCLES

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

USCF-241N-4BS66


1:Au 1U\*  
2:Au 3U\*  
5:Au 15U\*  
6:Au 30U\*

W:WHITE  
B:BLACK  
1:FPBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

5	SHRAPNEL	STAINLESS STEEL	1		.X	±0.30	.X*	±2*	UNITS	mm
4	HOOK	STAINLESS STEEL	1	PLATED TIN	.XX	±0.20	.XX*		MAT'L	
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX	±0.10	.XXX*		SEE NOTE	
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD/TIN					FINISH	
1	HOUSING	LCP+30%GF	1	UL94V-0					SEE NOTE	
NO	PARTS	MATERIAL	QTY	FINISHING					Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



雅安科技有限公司  
ACCURATE INNOTECH INC.

TITLE: USB TYPE C MALE 铆合款3.9 夹板0.8 鱼叉脚

PART NO.: USCM-24XN-4BS66

DR: Ricky 2023/06/21

DWG NO.: AII-S66

CHKD: Ricky 2023/06/21

APPD:

SCALE SHEET REV. CUSTOMER DRAWING  
1:1 1/1 B DRAWING