





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

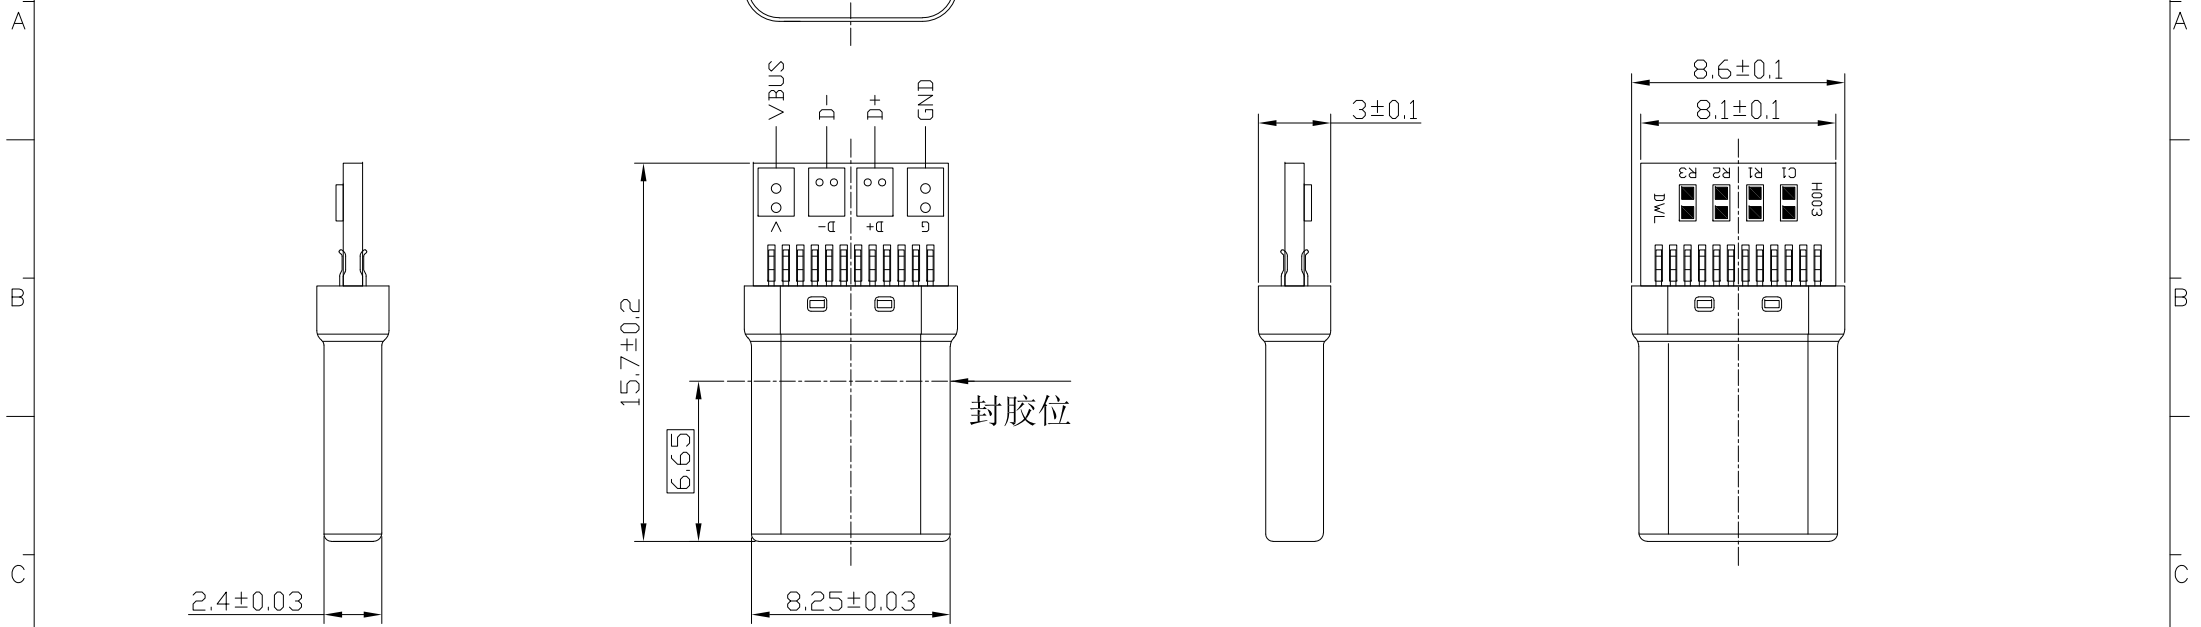

NOTES:
 1.ELECTRICAL:
 1)CURRENT RATING: 3AMP MAX;
 2)INSULATION RESISTANCE: 100MΩ MIN; 250V DC
 3)CONTACT RESISTANCE: 40mΩ MAX;
 4)WITHSTANDING VOLTAGE: 300V AC;
 5)OPERATING TEMPERATURE:-30°C TO +85°C.
 2.Mechanical:
 1)Mating Force: 35N MAX.
 2)Unmating Force: 10N MIN.
 3)Durability: 10,000 cycles
 3.DIMENSIONS MARKED "▼"
 TO BE CHECKED BY Q.C & IPQC.

R1:56KΩ±5% 0402
 R2:空
 R3:空
 C1:空
 USCF-241N-4BSJ54-007
 1:Au 1U"
 2:Au 3U"
 5:Au 15U"
 6:Au 30U"
 W:WHITE
 B:BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SUB1	D-	D+	CC1	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	CC2	D+	D-	SUB2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
4	HOOK	STAINLESS STEEL	1		X.	±0.30	X.*	±5°	UNITS	TITLE: USB TYPE CM 24P 拉伸款带板 4芯充电数据2.0传输	
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.X	±0.25	.X*	±2°	MAT'L	PART NO.: USCM-24XN-4BSJ54-007	
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD/TIN	.XX	±0.15	.XX*	±1°	SEE NOTE	DR: Ricky 2022/04/26	
1	MOLDING	LCP+20%GF	1	UL94V-0	.XXX	±0.10	.XXX*	±0.5°	FINISH	DWG NO.: AII-SJ54-007	
									SEE NOTE	CHKD: Ricky 2022/04/26	
									Q'TY	SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

