





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

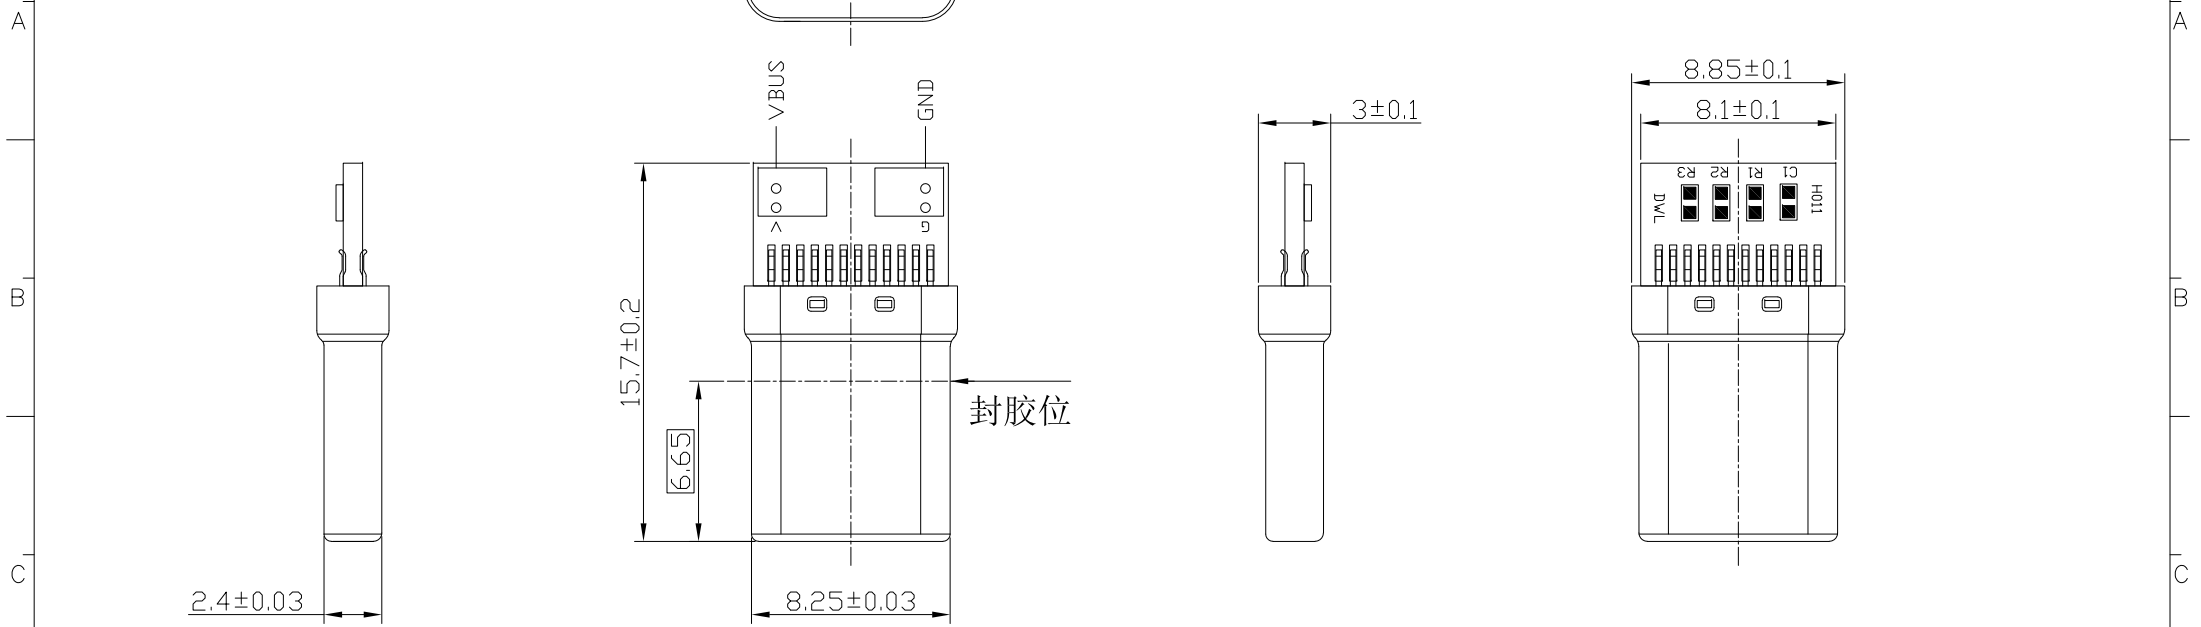

NOTES:

1.ELECTRICAL:

- 1)CURRENT RATING: 3AMP MAX;
- 2)INSULATION RESISTANCE: 100MΩ MIN; 250V DC
- 3)CONTACT RESISTANCE: 40mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 300V AC;
- 5)OPERATING TEMPERATURE:-30°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 35N MAX.
- 2)Unmating Force: 10N MIN.
- 3)Durability: 10,000 cycles

3.DIMENSIONS MARKED "▼"

TO BE CHECKED BY Q.C & IPQC.

USCF-241N-4BSJ54-011

- 1:Au 1U"
- 2:Au 3U"
- 5:Au 15U"
- 6:Au 30U"
- W:WHITE
- B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SUB1	D-	D+	CC1	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	CC2	D+	D-	SUB2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING													
4	HOOK	STAINLESS STEEL	1		X.	±0.25	X.*	±5°	UNITS	mm	<p style="text-align: center;">雅安科技有限公司 ACCURATE INNOTECH INC.</p> <p>TITLE: USB TYPE CM 24P 拉伸款帶板 2芯充電 56K</p> <p>PART NO.: USCM-24XN-4BSJ54-011</p> <p>DR: <i>Ricky</i> 2022/04/26</p> <p>CHKD: <i>Ricky</i> 2022/04/26</p> <p>DWG NO.: AII-SJ54-011</p> <p>SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING</p>						
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.X	±0.20	.X.*	±2°	MAT'L								
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD/TIN	.XX	±0.05	.XX.*	±1°	SEE NOTE								
1	MOLDING	LCP+20%GF	1	UL94V-0	.XXX	±0.02	.XXX.*	±0.5°	FINISH	SEE NOTE							
									Q'TY		<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</p>						