







RoHS
Compliant
2002/95/EC




REV.	ECN.	NO.	APPD.

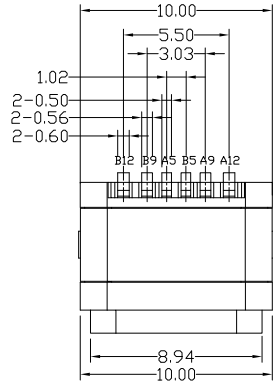





AFTER MATING

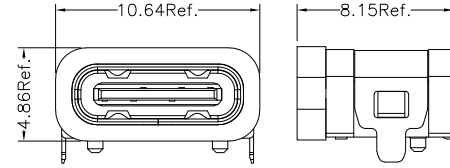

WITH O-RING

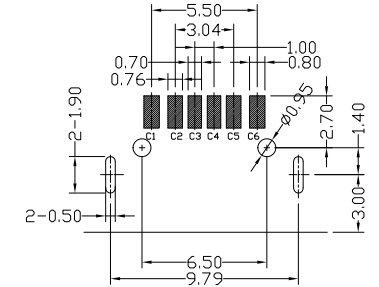

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING: 5.0V 3A MAX..
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 40mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC
- 5)OPERATING TEMPERATURE:-30°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 5N~20N
- 2)Unmating Force: 8N~20N
- 3)Durability: 10,000 cycles

3.DIMENSIONS MARKED "▼" " TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

UWCF-061N-4BVS27

1Au 1U"
2Au 3U"
5Au 15u"
6Au 30U"
W/WHITE
B/BLACK
1PBT
2PA6T
3PA9T
4LCP

6	WATERPROOF RING	硅橡胶	1	BLACK	X.X ±0.30	X.* ±10'	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
5	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.20	.XX* ±8"	MAT'L	TITLE: USB Type-CF 单排6P 两脚插板 板上防水型		PART NO.: UWCF-06XN-4BVS27		
4	SHIELDING PLATE	STAINLESS STEEL	1		.XXX ±0.10	.XXX* ±5"	SEE NOTE					
3	CONTACT	COPPER ALLOY	6	PLATED GOLD/TIN			FINISH	DR: Ricky 2021/04/27		DWG NO.: AII-VS27		
2	SHELL HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		SEE NOTE					
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY	CHKD: Ricky 2021/04/27				
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
							1:1	1/1	B			