



PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

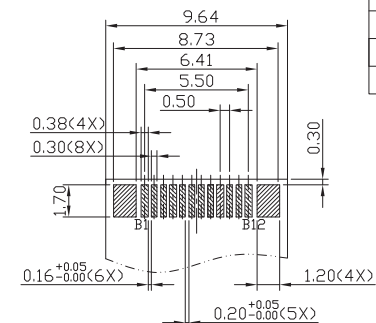

BOTTOM VIEW

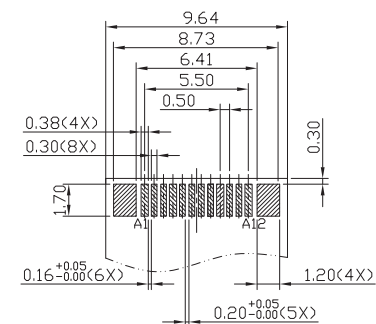

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS 0.80±0.05MM;DEFAULT TOLERANCE:±0.05

TO BE CHECKED BY Q.C & IPQC.

1:Au	1U''	—
2:Au	3U''	
5:Au	15U''	
6:Au	30U''	

— 1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

5					.X ±0.30	X.* ±10°	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
4	FRONT SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.20	.X* ±8°	MAT'L						
3	MID PLATE	STAINLESS STEEL	1		.XXX ±0.10	.XX* ±5°	SEE NOTE	TITLE: USB TYPE CF 24P 夹板0.8 L=5.75 短体6.80	PART NO.: USCF-24XN-4BHU34				
2	TERMINAL	COPPER ALLOY	24		PLATED GOLD/NICKEL			FINISH SEE NOTE	DR: Ricky 2021/12/27	DWG NO.: AII-HU34			
1	HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD: Ricky 2021/12/27	SCALE SHEET REV. CUSTOMER DRAWING				
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:					